


LUMELINE-RT

Direct View Linear LED Strip Fixture

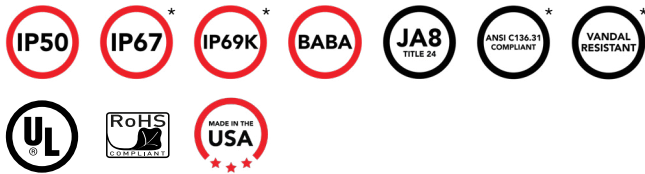

*Contact Factory for Exterior Installations

Customer: _____ Date: _____ Type: _____
Project: _____


Wattage	8W per linear ft.
Input Voltage	24VAC
Control	Standard Magnetic Low Voltage Dimming, Compatible with Forward, Reverse Phase, 0-10V, DMX
LED Spacing	0.67" on Center
Length	12"-96", 6" increments - 12" maximum. Allow 1/4" for each end cap and 2" for power feed cable.
Total Height	1.24" (not including clip), Satin Ice Lens adds 1/8"
Total Width	1.68"
Color Options	2000K, 2400K, 2700K, 3000K, 3500K, 4000K, 5000K
Mounting	Fixed, Swivel, 3" Arc or 6" Arc
Available Optics	120°x120°
Rating	IP50
CRI	90+ CRI
Power Cable	UL Standard 10 ft.
Finish	Black, White, Grey
Material	Anodized Aluminum
Custom	Contact Factory
Dimming	Patented CleanDim® Technology ensures even dimming from 0-100%.
Max Run	Voltage Dependent (Class 2 Limited)
Environmental	Operating temperature: -40°F-140°F Ambient(-40°C-60°C)** Storage temperature: -40°F-140°F Ambient indoor fixtures operation limited to =<50% relative humidity

** Military spec available under special request-lead times may be impacted.

PRODUCT SPECIFICATIONS:

PRODUCT	WATTAGE	COLOR OPTION	FIXTURE VOLTAGE	TRANSFORMER PRIMARY VOLTAGE	OPTIC	FINISH	LOCATION	MOUNTING	LENS	OPTIONS
LUMELINE										
	8W	2000K 2400K 2700K 3000K 3500K 4000K 5000K	24VAC	120V 230V 227V	120°x 120°	W White B Black G Gray	I Interior-IP50	F Fixed S Swivel H Hinge 3Arc 3" Arc Swivel 6Arc 6" Arc Swivel	C Clear D Diffused SI Satin Ice (Interior Use Only) OW Opal White (Exterior Use Only)	SB Square Baffle ASYM Asymmetric Baffle SKB Kicker Baffle
				*Fixture is 24VAC			*Contact factory for IP67 and IP69K.			


DIMENSIONS:

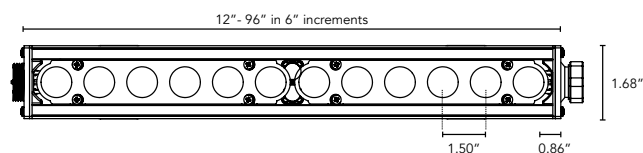

Plan View




Elevation View




End View

MOUNTING INFORMATION:


For vertical installation please contact the factory for specific mounting instructions.





Swivel



Fixed



Hinge

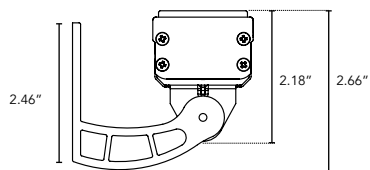

Arc

LENS OPTIONS:

DIFFUSED GLASS

- 87% transmission
- Lens is 1/8" (.09) thick, adds 1/16" to overall height of fixture
- Additional charges apply

Satin Ice White

- Best for direct view use
- 42% transmission
- Lens is 1/4" (.25) thick, adds 1/8" to overall height of fixture