



PDMX-C

Boca Wireless Family: Professional DMX Controller

Customer:

Date:

Type:


Project:




- The Boca Flasher PDMX-C provides a Wireless DMX Diagnostic, troubleshooting and control solution to any Boca Flasher fixture DMX networked installation.
- 3.5" Resistive Touch-screen.
- Rechargeable Lithium battery with 14+ hours of service capacity.
- 2.4GHz PA Transmitter.
- Dual RJ45 Data output.
- 24db Effective Radiated Power.
- Smart Link Protocol.
- RSSI and DMX Quality meter
- 500m Radius coverage
- 12 Diagnostic Tools
- Compatible with: NanoRFO, NanoRouter, NanoRouter-X, SDS-DMX,

DIMENSIONS:


Plan View

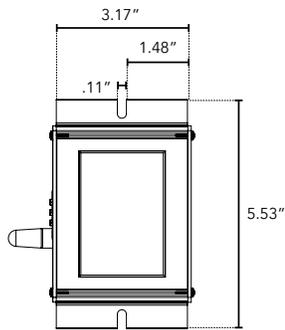

Elevation View

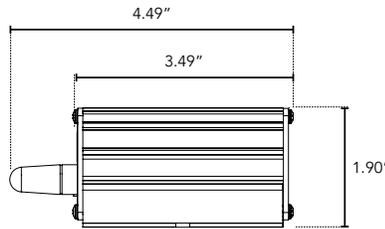

Endcap View

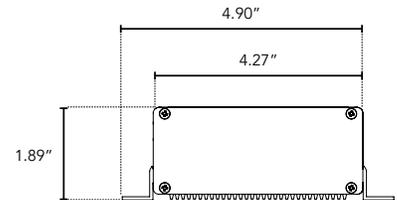

TECHNICAL SPECIFICATIONS:

| | |
|---------------|--------------------------------|
| INPUT VOLTAGE | 9Vdc |
| INPUT PORT | DMX (Hard Wire or Wireless) |
| OUTPUT PORTS | Dual RJ45, W-DMX |
| FREQUENCY | 2.4GHZ |
| TOTAL WIDTH | 5.5" |
| TOTAL HEIGHT | 2.0" |

PDMX-C

Boca Wireless Family: Professional DMX Controller



MATRIX:

| | | CONTROLS | | | | | | | | | | | |
|----------|---------------|----------|---------|---------|---------|-------|------------|--------------|-----|---------------|-----------|-----------|--------|
| | | SDS10V | SDS-DMX | NDI-10V | NDT-10V | N-RFO | NanoRouter | NanoRouter-X | WA5 | Monolink-W10V | MonoBoost | MonoDMXTX | PDMX-C |
| FIXTURES | NanoHD | ● | ● | ● | | ● | ● | ● | | ● | | | |
| | NanoWarmDim | ● | ● | ● | | ● | ● | ● | | ● | | | |
| | NanoLume | ● | ● | ● | | ● | ● | ● | | ● | | | |
| | NanoX | ● | ● | ● | | ● | ● | ● | | ● | | | |
| | HPNFC-HO | ● | ● | | | | | | | | | | |
| | HPNLS-HO | ● | ● | | | | | | | | | | |
| | HPNLS-LO | ● | ● | | | | | | | | | | |
| | Lumeline | ● | ● | | | | | | | | | | |
| | Niche-HV | ● | ● | | | | | | | | | | |
| | SBL-MC | ● | ● | | | | | | | | | | |
| | NanoMix | | | | | | ● | ● | | | | | |
| | HPNLS-MIX | | | | | | ● | ● | | | | | |
| | Tri-Light HV | | | | | | ● | ● | | | | | |
| | NanoTune | | | | ● | ● | ● | ● | | | | | |
| | HPCCS | | | | | | ● | ● | ● | | ● | ● | ● |
| | HPFB | | | | | | ● | ● | ● | | ● | ● | ● |
| | SBL-MIX | | | | | | ● | ● | ● | | ● | ● | ● |
| | N-RFO | | | | | | ● | ● | ● | | ● | ● | ● |
| | NanoRouter | | | | | | ● | ● | ● | | ● | ● | ● |
| | NanoRouter-X | | | | | | ● | ● | ● | | ● | ● | ● |
| | Monolink-W10V | | | | | | ● | ● | ● | | ● | ● | ● |
| | MonoBoost | | | | | | ● | ● | ● | | ● | ● | ● |
| | WA5 | | | | | | | | | | | | ● |
| | SDS-DMX | | | | | | ● | ● | ● | | ● | ● | ● |
| | SDS-10V | | | | | | | | | ● | | | |