



# NANOLUME

Micro Profile LED Task and Cove Fixture



Customer: \_\_\_\_\_ Date: \_\_\_\_\_ Type: \_\_\_\_\_

Project: \_\_\_\_\_

<b>Wattage</b>	3W or 6W per linear ft.
<b>Input Voltage</b>	90-120V or 230-277V
<b>Control</b>	Forward/Reverse Phase Line Dimmer, 0-10V, DALI, DMX
<b>LED Spacing</b>	5/8" on center
<b>Length</b>	12-72", in 6" increment allow 1/4" for each end cap and 1.25" for power feed cable
<b>Total Width</b>	1.03"
<b>Total Height</b>	0.82"
<b>Color Options</b>	2000K, 2400K, 2700K, 3000K, 3500K, 4000K, Red, Green, Blue, Amber, Lime
<b>Mounting</b>	Fixed, Hinge
<b>Available Optics</b>	15°x40°, 120°x120°
<b>CRI</b>	90+ CRI
<b>Rating</b>	IP50
<b>Finish</b>	White, Black
<b>Material</b>	High Temperature ABS Plastic
<b>Custom</b>	Contact Factory
<b>Dimming</b>	Patented CleanDim® Technology ensures even dimming from 0-100%.
<b>Max Run</b>	80 ft @ 120V (6W), 150ft @277V (6W)




\*\* Military spec available under special request-lead times may be impacted.

## PRODUCT SPECIFICATIONS:


PRODUCT	WATTAGE	COLOR OPTION	VOLTAGE	OPTIC	FINISH	MOUNTING	LENS	BAFFLE	REFLECTOR*	DIMMING*	ACCESSORY
NANOLUME	3W 6W	2000K 2400K 2700K 3000K 3500K 4000K Red Green Blue Amber Lime	120V 277V	15°x40° 120°x120°	W White B Black	F Fixed H Hinge	C Clear CLD Clear Light Diffused* HD Heavy Diffused*	SB Square Baffle ASYM Asymmetric Baffle	Y Yes N No	STANDARD DIMMING 0-10V DIRECT 1 Channel 0-10V REMOTE DMX REMOTE DALI REMOTE	T Track Mount (Only available with Fixed Mounting)  Note: Knife Edge Cove compatible.
							*Not Available with 10"x10" OR 15"x45" Optics		*Boosts overall output by 10% *Only Available with 120° Optics	*Extra Charge May Apply	

**DIMENSIONS:**

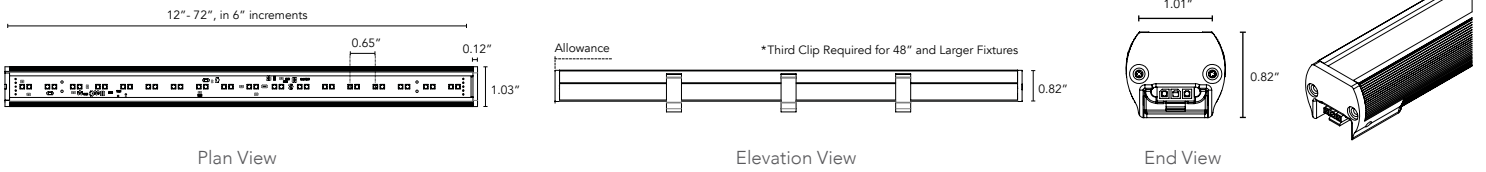

**MOUNTING INFORMATION:**

For vertical installation and installations above 4' please contact the factory for specific mounting instructions.

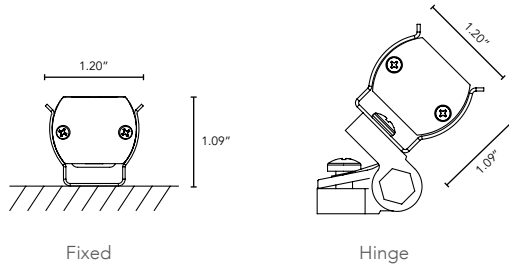



**LUMINAIRE INFORMATION:**

CCT (K)	Wattage	Lumens	LPW
2000	6	432	72
2400	6	510	85
2700	6	560	94
3000	6	588	98
3500	6	618	103
4000	6	636	106

\* Typical delivered lumen data is approximate. Actual lumens will vary due to installation environment and beam pattern. Please see IES files.

**ACCESSORY:**

Track Mount Clip System is only available with Fixed Mounting.

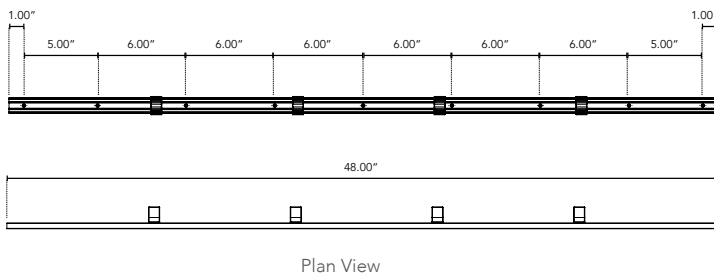

**KNIFE EDGE COVE:**

See Knife Edge Cove specification sheet for additional information.

