




1 PLAN VIEW




2 ELEVATION VIEW



END CAP CONDITIONS




MALE (M)




FEMALE (F)

MOUNTING OPTIONS



SIDE VIEW OF HINGE ASSEMBLY

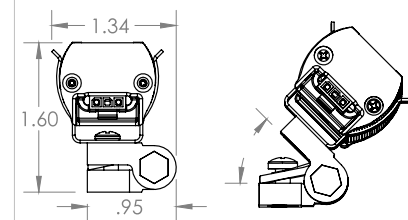

TECHNICAL DATA	
Parameter	Data
Wattage	3 watts per linear ft
Input Voltage	90-120V or 230-277V
Input Current per Linear Ft	26mA@ 120V or 14mA@ 227V
Control	Leading-edge/ Trailing-edge line dimmer
Power Cable Length	UL Standard 10ft
LED Spacing	5/8" on Center
Fixture Length	12"-72" in 4" increment
Fixture Width	1.04"
Total Height	0.89"
Mounting	Adjustable Swivel Clip
Available Optics	120°
Finish Options	White or Black high temperature ABS plastic
LED Color Options	2000K, 2400K, 2700K, 3000K, 3500K, 4000K, 5000K, 6500K
Color Rendering Index	90+ CRI
Ratings	Dry
Total linear ft per 20A breaker	432 ft@ 120V or 804 ft @ 277V
Total linear ft per 15A	324 ft@ 120V or 600 ft @ 277V
Total linear ft per power feed	156 ft@ 120V or 276 ft @ 277V
Transformer	N/A



LIGHTING | CONTROLS

LED Lighting Systems, Technologies, & Manufacturing

508 South Military Trail  
Deerfield Beach FL, 33442

www.BocaFlasher.com  
(561) 989-5338

THIS DOCUMENT IS CONFIDENTIAL AND PROTECTED  
BY COPYRIGHTS OF BOCA FLASHER INC.

PRODUCT NAME:  
**NANOTUNE**

FILE NAME: TECHNICAL SHEET

PART #: NANOTUNE

DRAWN BY: HYERI KANG

DATE: 03272020

DESIGN BY: LUIS ROSADO

APPROVED BY: M. PINDER

SCALE:

SHEET: 1 OF 1

REV: B