



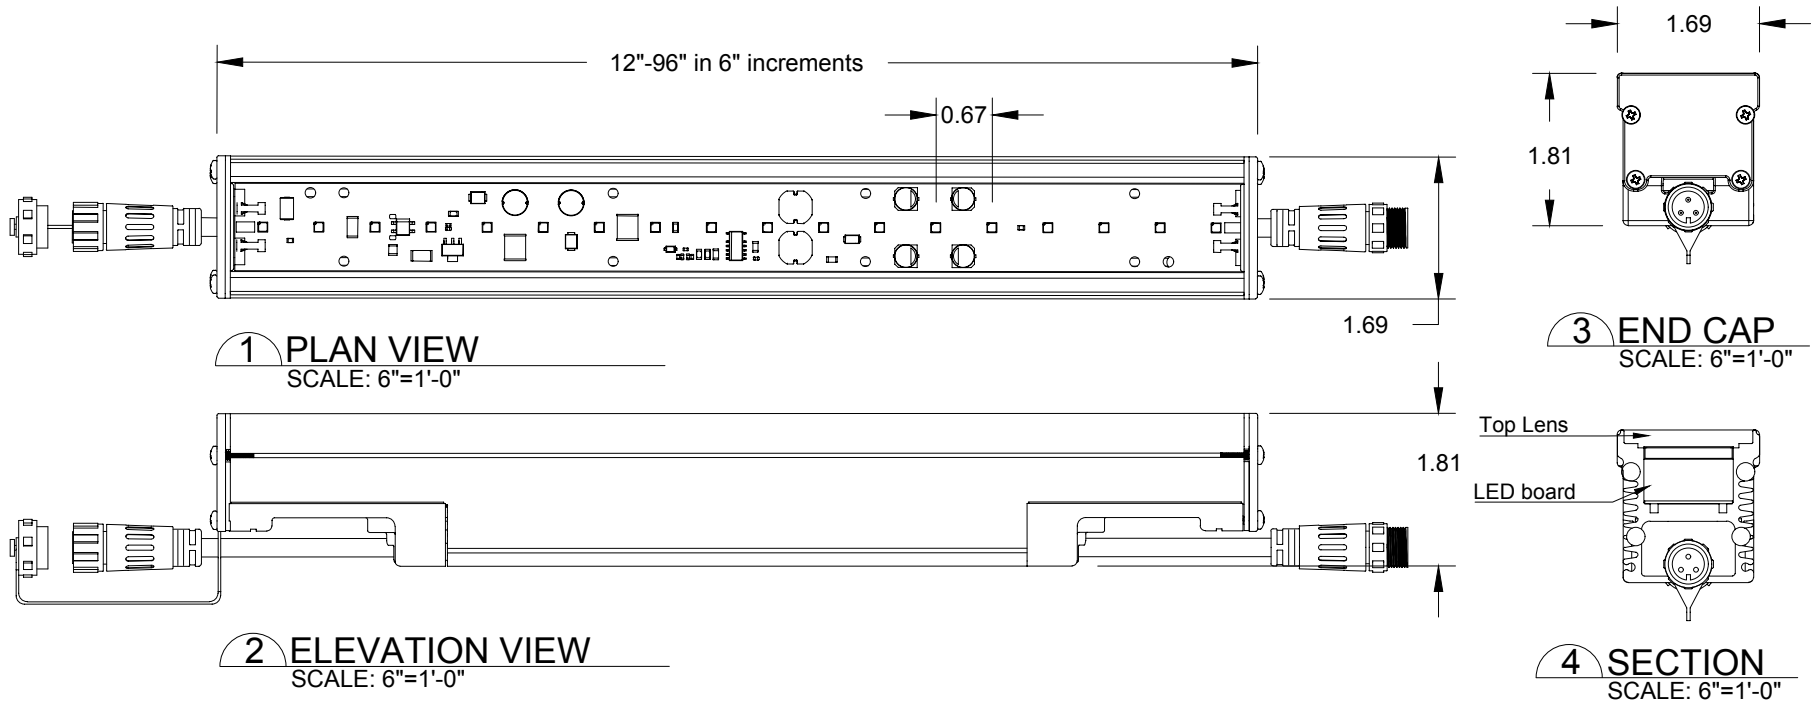


TECHNICAL DATA

Parameter	Data
Wattage per Linear Ft.	3.9W @ 120V, 4.1W @ 277V
Input Voltage	90-120VAC, 230-277VAC
Input Current per Linear Ft	35.1mA @ 120V, 18.2mA @ 277V
Control	Leading edge/ Trailing-edge line dimmer
Power Cable Length	UL Standard 18AWG, 6.5ft.
LED Spacing	0.67"
Fixture Length	12"-96" in 6" increments
Fixture Width	1.69"
Total Height (Not Including Clip)	1.81"
Mounting	Adjustable Swivel Clip
Available Optics	120°
Finish Options	White or Black high temperature ABS Plastic
LED Color Options	2K, 24K, 27K, 3K, 35K, 4K, 5K, 65K
Color Rendering Index	90+ CRI
Ratings	Dry
Total linear ft per 20A breaker	455ft. @ 120V, 880ft. @ 277V
Total linear ft per 15A breaker	341ft. @ 120V, 660ft. @ 277V
Total linear ft per power feed	113ft. @ 120V, 220ft. @ 277V
Transformer	N/A

MOUNTING OPTIONS

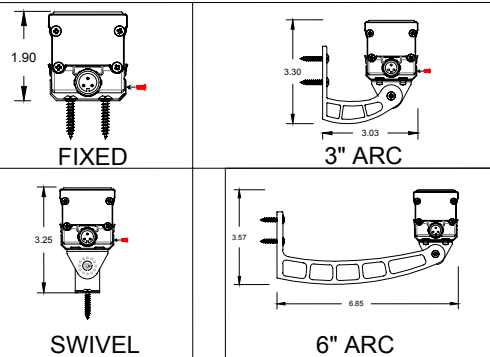

END CAP CONDITIONS

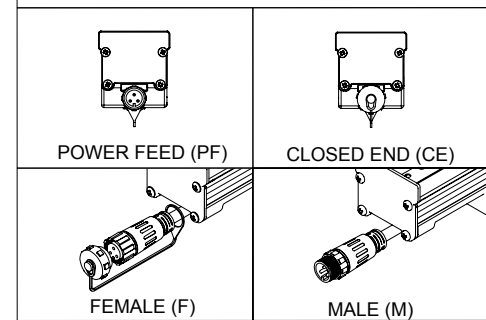

LIGHTING | CONTROLS

LED Lighting Systems, Technologies, & Manufacturing

508 South Military Trail
Deerfield Beach FL, 33442

www.boca.lighting
(561)989-5338

THIS DOCUMENT IS CONFIDENTIAL AND PROTECTED BY
COPYRIGHTS OF BOCA LIGHTING AND CONTROLS

PRODUCTS NAME:

BF-LUMELINE-12IN-4W

FILE NAME: TECHNICAL SHEET

PART #: BF-LUMELINE

DRAWN BY: HYORIM LEE

DATE: 04032025

DESIGN BY: LUIS ROSADO

APPROVED BY: DAVE URBAN

SCALE: NTS

SHEET: 1 OF 1

REV: 04032025