



NANO X WARM DIM

Micro Profile Exterior LED Task and Cove Fixture with Warm Dim

Customer: _____ Date: _____ Type: _____

Project: _____



Wattage	3W, 6W or 10W per linear ft.
Input Voltage	90-120V or 230-277V
Control	Forward/Reverse Phase Line Dimmer, Compatible with 0-10V, DALI, DMX*
LED Spacing	0.65" on Center
Length	12-72", in 6" increment
Total Width	1.21" Fixed Clip
Total Height	2.08"
Input Current	54mA @ 120V, 24mA @ 277V
Mounting	Fixed, Hinge
Available Optics	15x40°, 120°
Finish	Clear Anodized Aluminum
Color Options	2000K-3000K - (Contact Factory for other options)
Max Run	76ft. @ 120V, 156ft. @ 277V
Rating	IP50, IP67
CRI	90+ CRI
Material	Anodized Aluminum
Custom	Contact Factory
Dimming	Patented CleanDim® Technology ensures even dimming from 0-100%.
Environmental	Operating temperature: -40°F-140°F Ambient(-40°C-60°C)** Storage temperature: -40°F-140°F Ambient indoor fixtures operation limited to =<50% relative humidity

*Uses Boca SDS Module for 0-10V, Dali, or DMX Dimming.

** Military spec available under special request-lead times may be impacted.




PRODUCT SPECIFICATIONS:

PRODUCT	WATTAGE	COLOR OPTION	VOLTAGE	OPTIC	FINISH	MOUNTING	LENS	BAFFLE	REFLECTOR*	KNIFE EDGE COVE	ACCESSORY
NANO X WARM DIM	3W 6W 10W	2000K-3000K	120V 277V	15°x40° 120°x120°	A Clear Anodized Aluminum N Natatorium Finish* C Custom*	F Fixed H Hinge	C Clear CLD* Clear Light Diffused HD* Heavy Diffused	SB Square Baffle ASYM Asymmetric Baffle	Y Yes N No	Y Yes N No	T Track Mount (Only available with Fixed Mounting)
		*Contact Factory for other Options			*Additional charges may apply		*Not Available with Optics		*Only Available with 120° Optics		Note: Knife Edge Cove compatible.

DIMENSIONS:

Note: Allow for 1/4" for each end cap and 1.25" for power feed cable.

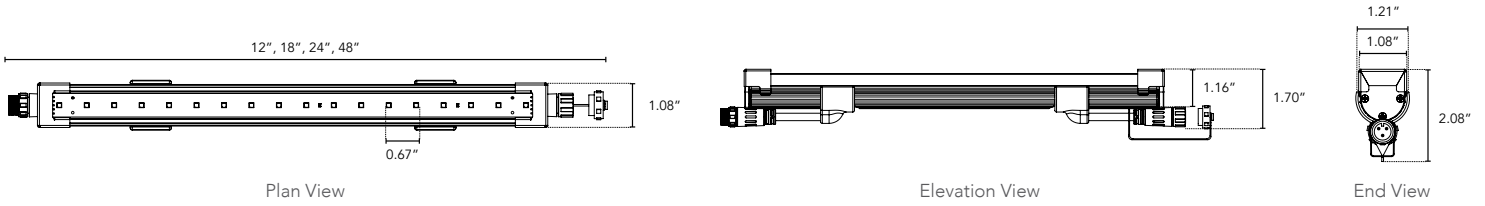

MOUNTING INFORMATION:

For vertical installation and installations above 4' please contact the factory for specific mounting instructions.

