



- Fixture uses high intensity LED's in a variety of color combinations.
- Compact, rugged, linear fixture easily integrates into many applications.
- Many options in optics, color temperature and accessories.
- Wireless DMX controllable.
- Simple installation process using conventional wiring.
- UL Listed for dry or damp or wet location (model dependent).
- Clear anodized aluminum housing with a durable finish ensuring it is weather and abrasion resistant.
- Clear or Diffuse (interior only) lens.
- Uses any standard DMX 512 show controls.
- Contact Boca Flasher for tips with custom installations.




PRODUCT SPECIFICATIONS:


| COLOR OPTION | OPTIC | VOLTAGE | FINISH | LOCATION | MOUNTING | WHITE MIXING OPTIONS |
|--|--|----------------|----------------------------------|---|--|---|
| HPFB | | | A | | | |
| RGB | 10° | 120V | A Clear Anodized Aluminum | I Interior-IP60 E Exterior-IP65 W Wet-IP68 | F Fixed S Swivel V Vandal Resistant | If specifying RGBW indicate white options here: (Up to 3 different options can be specified) 2700K 3000K 3500K 4000K 5000K Amber |
| RGBW color & white (See Options) | 30° | 277V | | | | |
| RGB/WWW | 60° | | | | | |
| RGB/WWA | 10°x 60° | | | | | |
| | 30°x 60° | | | | | |
| | | | | | | |
| LENS | CONTROLS | HEXCELL | | | | |
| C Clear | 3 3 Channel DMX | Y Yes | | | | |
| D Diffused (Interior Use Only) | 4 4 Channel DMX 6 6 Channel DMX 8 8 Channel DMX | N No | | | | |

DIMENSIONS:


Plan View

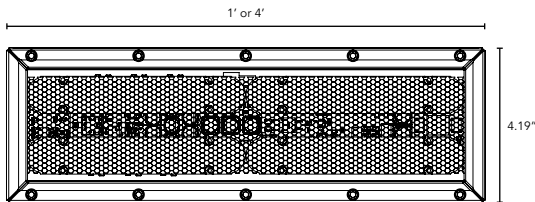

Elevation View

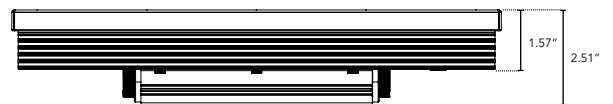

End View

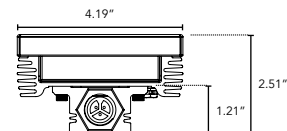

HPFB

Medium Profile Color Changing LED Fixture

TECHNICAL SPECIFICATIONS:

| | |
|-----------------------------|--|
| WATTAGE | 42 watts per linear ft.* |
| INPUT VOLTAGE | 120 VAC or 277 VAC |
| CONTROL | Standard DMX 512 |
| LED SPACING | 1.0" on center |
| LENGTH | 1 ft., 2 ft., or 4 ft. |
| TOTAL HEIGHT | 2.51" (not including clip) |
| TOTAL WIDTH | 4.19" |
| COLOR OPTIONS | RGB, RGBW |
| MOUNTING | Fixed, Swivel, or Vandal Resistant |
| AVAILABLE OPTICS | 10°, 30°, 60°, 10° x 60°, 30° x 60° |
| RATING | IP50, IP65, IP68 |
| COLOR RENDERING INDEX (CRI) | 90+ for White Mixing Only |
| POWER CABLE | UL Standard 10 ft. |
| ENVIRONMENTAL | Operating temperature--40°F-140°F Ambient(-40°C-60°C)** Storage temperature -40°F-140°F Ambient indoor fixtures operation limited to =<50% relative humidity |


*Custom wattage available upon request.

Title 24 compliant fixture not to exceed 18 watts / 4ft fixture.

** Military spec available under special request-lead times may be impacted.

MOUNTING INFORMATION:

- For vertical installation please contact the factory for specific mounting instructions.
- For installations above 4' please contact the factory.

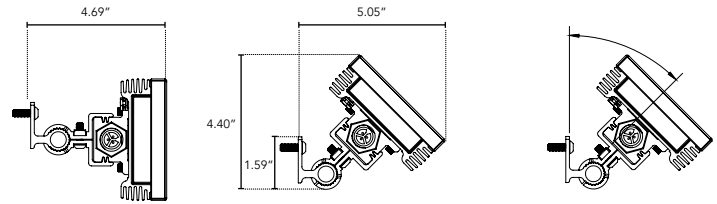

Vandal Resistant

