



- Compact, rugged, linear fixture easily integrates into many applications.
- Now available with triple diode RGB boards (not available with optics).
- Many options in optics, color temperature, and accessories.
- Simple installation using conventional wiring.
- Clear lens.
- Wireless DMX controllable.
- Uses any standard DMX 512 show controller.
- Clear anodized aluminum housing with a durable finish making it weather and abrasion resistant.
- UL Listed for dry, damp, or wet location (model dependent).
- Contact Boca Flasher for tips with custom installations.




PRODUCT SPECIFICATIONS:

COLOR OPTION	OPTIC	VOLTAGE	FINISH	LOCATION	MOUNTING	LENS	WHITE MIXING OPTIONS
HPCCS-MP			A			C	
RGB	10°	120V	A Clear Anodized Aluminum	I Interior-IP50	F Fixed	C Clear	If specifying WM indicate white options here: (Up to 3 different options can be specified) 2700K 3000K 3500K 4000K 5000K Amber
RGBW	30°	277V		E Exterior-IP65	H Hinge		
TRGB Triple Diode (120° only)	60°			W Wet-IP68	3Arc 3" Arc Swivel		
WM White Color Mixing	10°x 60°				6Arc 6" Arc Swivel		
*See White Mix Options	30°x 60°				V Vandal Resistant		
	120°						


MOUNTING INFORMATION:

- Fixtures 1-2ft, Place clips 3" from edge as shown.
- Fixtures more than 2ft, Place clips 3.5" from edges as shown.


Fixed

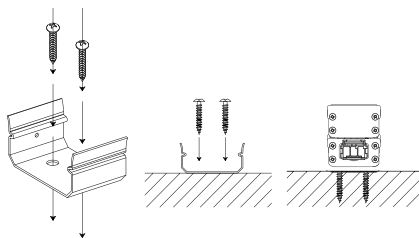

Swivel

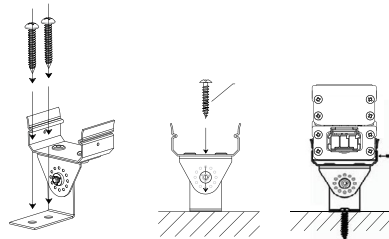

Hinge

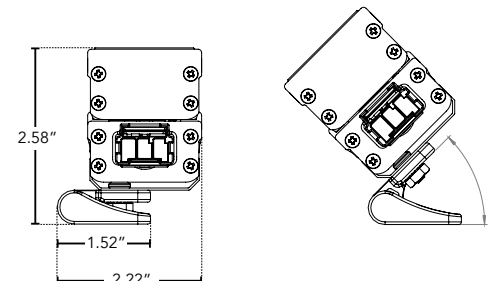

HPNLS-MIX

Small Profile Color Changing LED Fixture



TECHNICAL SPECIFICATIONS:

WATTAGE	12 watts per linear ft.
INPUT VOLTAGE	90-120V 230-277V
CONTROL	Standard DMX 512
LED SPACING	1.0" on center
LENGTH	12"-96", 12" Increment
TOTAL HEIGHT	1.68"
TOTAL WIDTH	1.80" (not including clip)
COLOR OPTIONS	Alternating RGB, RGBW, Triple Diode RGB, White Mixing
MOUNTING	Fixed, Hinge, Vandal, Arc 3 or Arc 6
AVAILABLE OPTICS	10°, 30°, 60°, 10° x 60°, 30° x 60°, 120°
RATING	IP50, IP65, IP68
COLOR RENDERING INDEX (CRI)	90+ for White Mix Only
POWER CABLE	UL Standard 6.5 ft.
ENVIRONMENTAL	Operating temperature -40°F-140°F Ambient (-40°C-60°C)** Storage temperature -40°F-140°F Ambient indoor fixtures operation limited to =<50% relative humidity

*Custom wattage available upon request.

Title 24 compliant fixture not to exceed 18 watts / 4ft fixture.

** Military spec available under special request-lead times may be impacted.


LIGHTSOURCE REPORT

White w/Clear Glass Lens	White w/Clear Glass Lens
CIE Colorimetric Parameters CCT: Tc = 3088K	RGBW w/Clear Glass Lens CCT: Tc = 4392K
Photometric Parameters Luminous Flux: 634.40 lm Efficiency: 59.46 lm/W	Photometric Parameters Luminous Flux: 922.16 lm Efficiency: 34.65 lm/W

DIMENSIONS:

- For vertical installation please contact the factory for specific mounting instructions.
- For installations above 4' please contact the factory.

Elevation View

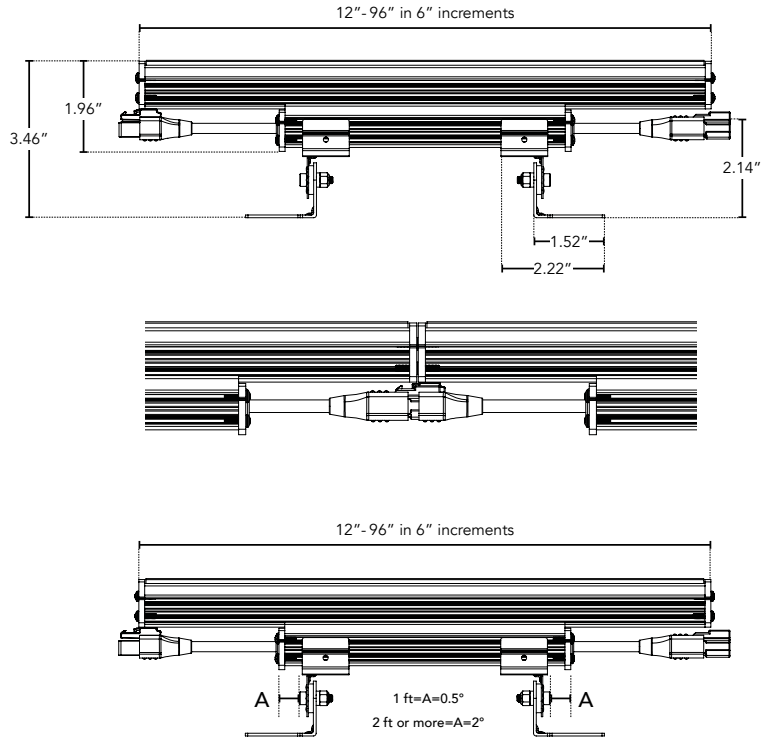

Vandal Resistant

