

TRI-LIGHT RT

Triple Diode DMX Controlled Linear LED Fixture

Customer:

Date:

Type:

Project:



- Triple diode ensures even color washing even at short distances.
- Compact, variable light fixture for dry, damp or wet location use.
- Fixture comes in 6" increments (12" minimum).
- Many options in accessories to suit a range of projects.
- UL Listed for dry or damp or wet location (model dependent).
- Anodized aluminum housing with a durable finish ensuring it is weather and abrasion resistant.
- Clear anodized aluminum or black finish. Check factory for availability.
- Four different types of lenses.
- Can use standard 512 DMX show controls. Need BOX TRI-2M for proper distribution.
- Total linear feet per power feed: 8ft - Class 2 limited.




PRODUCT SPECIFICATIONS:

	COLOR OPTION	OPTIC	PRIMARY VOLTAGE	FINISH	LOCATION	MOUNTING	LENS	OPTION
Tri-Light RT		120°						
	1 Triple Diode RGB		120V	W White	I Interior-IP50	F Fixed	C Clear	
	2 RGB with White		277V (Light is 24VAC)	B Black G Gray	E Exterior-IP65 W Wet-IP68	S Swivel H Hinge V Vandal Resistant A Arc	D Diffused SI Satin Ice (Interior Use Only) OW Opal White (Exterior Use Only)	


DIMENSIONS:

- For vertical installation please contact the factory for specific mounting instructions.
- For installations above 4' please contact the factory.

Plan View

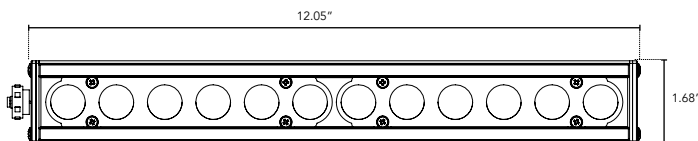

Elevation View

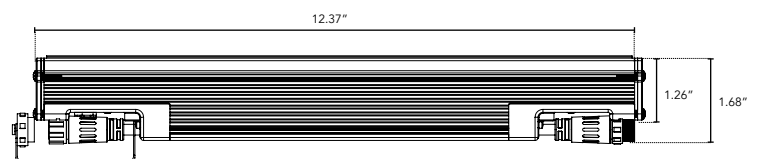

TRI-LIGHT RT

Triple Diode DMX Controlled Linear LED Fixture




TECHNICAL SPECIFICATIONS:

WATTAGE	8 watts per linear ft for RGB 10 watts per linear ft for RGBW
INPUT VOLTAGE	24 VAC
CONTROL	IMCS box w/ standard DMX512 control
LED SPACING	0.44" on center
LENGTH	12"-96"
TOTAL WIDTH	1.68"
TOTAL HEIGHT	1.75" (not including clip)
MOUNTING	Fixed, Swivel, Arc or Vandal Resistant
AVAILABLE OPTICS	120°
FINISH	Black, White or Gray powder coat
COLOR OPTIONS	Triple diode RGB, or triple diode RGB w/ white option
COLOR RENDERING INDEX (CRI)	90 + CRI
RATING	IP50, IP65, IP68
POWER CABLE	30 ft home run cable
ENVIRONMENTAL	Operating temperature -40°F-140°F Ambient (-40°C-60°C)** Storage temperature -40°F-140°F Ambient indoor fixtures operation limited to =<50% relative humidity

* Military spec available under special request-lead times may be impacted.

MOUNTING INFORMATION:

- Fixtures 1-2ft, Place clips 3" from edge as shown.
- Fixtures more than 2ft, Place clips 3.5" from edges as shown.

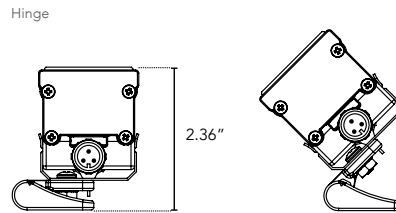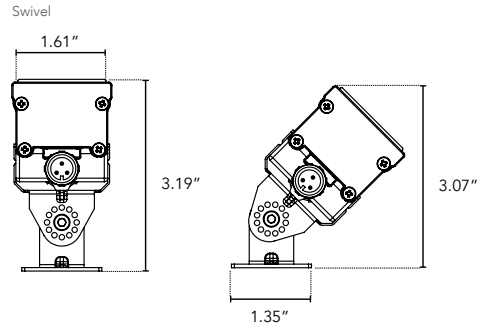

Vandal Resistant

