

- Submersible polycarbonate tube for underwater applications, including pools and fountains.
- Tube comes in 6" increments.
- Polycarbonate Tube tempered to ensure weather and abrasion resistant.
- Teflon coated end caps for lasting durability in extreme environments.
- UL listed for wet applications.
- Contact Boca Flasher for tips on custom installations.



PRODUCT SPECIFICATIONS:

- To specify with one board add "UW1" in the option box when specifying the AC100 or CSS-100 product.
- To specify with two boards mounted side by side (as shown), add "UW2" in the option box when specifying the AC100 or CSS-100 product.

TECHNICAL SPECIFICATIONS:


INPUT VOLTAGE	24VAC or 24VDC
WATTAGE	Varies based on product and configuration
POWER CBL LENGTH	Variable
MOUNTING	Fixed
HEIGHT	2.10" without clips
TUBE LENGTH	15" - 99" in 4" or 9" increments (model dependent)
TOTAL DIAMETER	1.5"
CLIP WIDTH	2.36"
RATING	IP50

ENVIRONMENTAL Operating temperature--40°F-140°F Ambient(-40°C-60°C)**
Storage temperature -40°F-140°F Ambient indoor fixtures
operation limited to =<50% relative humidity


* Military spec available under special request-lead times may be impacted.

DIMENSIONS:


Plan View (AC-100)




Plan View (CCS-100)




Elevation View

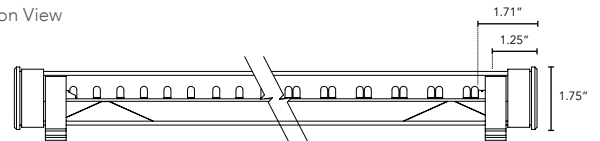

End Cap



Section In Tube



MOUNTING INFORMATION:

Fixed

