


MOUNTING OPTIONS



MOUNTING TAPE TUBE
(using approved adhesive tape) (fixture can rotate in tube)

TECHNICAL DATA	
Parameter	Data
Power	2.5W/ft for (20°, 50°), 3W/ft for 120°
Input Voltage	24VDC or 24VAC
Input Current per Linear Ft	90mA RMS per Linear Foot
Control	Standard Magnetic Low Voltage Dimming
Power Cable Length	25ft, 35ft, or 45ft (Job Specific)
LED Spacing	0.5" on center
Fixture Length	4" increments (white, b, g), 6" increments(r,a)
Fixture Width	0.62"
Total Height (not including clips)	0.41"
Mounting	Tube, Underwater Tube, No Tube
Available Optics	20°, 50°, 120°, or 30° (amber, r, g, b only)
Finish Options	N/A
LED Color Options	3K, 5K, amber, red, green, blue
Color Rendering Index	80
Ratings	Dry, IP66, IP68
Total Linear ft per 20A breaker	175 Feet
Total Linear ft per 15A breaker	146 Feet
Total Linear ft per Power Feed	40 Feet
Transformer	Primary 120V or 277V, Secondary 24V

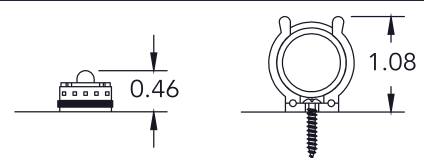

LIGHTING | CONTROLS

LED Lighting Systems, Technologies, & Manufacturing

508 South Military Trail
Deerfield Beach FL, 33442

www.BocaFlasher.com
(561) 989-5338

THIS DOCUMENT IS CONFIDENTIAL AND PROTECTED
BY COPYRIGHTS OF BOCA FLASHER INC.

PRODUCT NAME:
AC100 SINGLE

FILE NAME: TECHNICAL SHEET

PART #: AC100-1

DRAWN BY: DEMMLER FILLINGER

DATE: 03272020

DESIGN BY: LUIS ROSADO

APPROVED BY: ANGELA TODD

SCALE: NTS

SHEET: 1 OF 1

REV: A