




1 PLAN VIEW

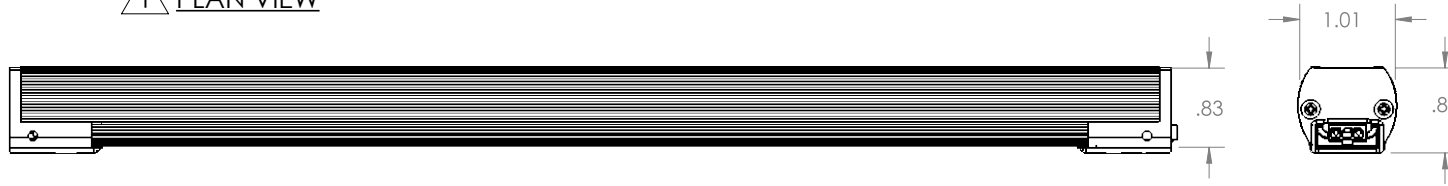


2 ELEVATION VIEW

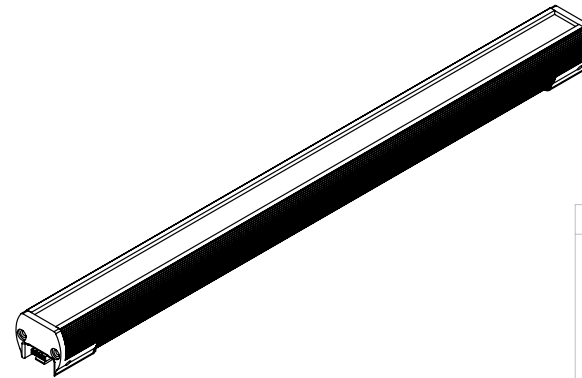

END CAP CONDITIONS




MALE (M)




FEMALE (F)

MOUNTING OPTIONS



SIDE VIEW OF HINGE ASSEMBLY

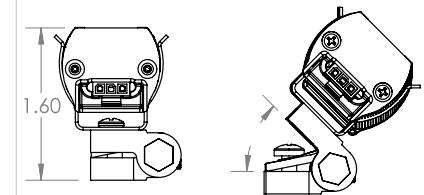

TECHNICAL DATA		
Parameter	Data	
Power	10W	6W
Input Voltage	120V or 277V	120V or 277V
Input Current per Linear Ft	87mA @120V 40mA @ 277V	53mA @120V 26mA @ 277V
Control	Line Voltage Dimmer	Line Voltage Dimmer
Power Cable Length	UL Standard 6.5ft	UL Standard 6.5ft
LED Spacing	0.67"	0.67"
Fixture Length	12"-72", in 4" increments	12"-72", in 4" increments
Fixture Width	1.01"	1.01"
Total Height (not including clips)	1.09"	1.09"
Mounting	Clip 10A, Clip17A, FXT154A	Clip 10A, Clip17A, FXT154A
Available Optics	15x40°, 120°	15x40°, 120°
Finish Options	Clear Anodized	Clear Anodized
LED Color Options	2000K, 2400K, 2700K,3000K, 3500K,4000K	2000K, 2400K, 2700K,3000K, 3500K,4000K
Color Rendering Index	95+	95+
Ratings	IP52	IP52
Total Linear ft per 20A breaker	180ft @ 120V, 420ft @ 277V	300ft @ 120V, 660ft @ 277V
Total Linear ft per 15A breaker	136ft @ 120V, 315ft @ 277V	220ft @ 120V, 490ft @ 277V
Total Linear ft per Power Feed	46ft @ 120V, 100ft @ 277V	75ft @ 120V, 166ft @ 277V
Transformer	N/A	N/A



LIGHTING | CONTROLS
LED Lighting Systems, Technologies, & Manufacturing

508 South Military Trail
Deerfield Beach FL, 33442

www.BocaFlasher.com
(561) 989-5338

PRODUCT NAME:
NANOLUME HD

FILE NAME: TECHNICAL SHEET

PART #: NANOLUME HO_UC

DRAWN BY: HYERI KANG

DATE: 05142020

DESIGN BY: LUIS ROSADO

APPROVED BY: M. PINDER

THIS DOCUMENT IS CONFIDENTIAL AND PROTECTED
BY COPYRIGHTS OF BOCA FLASHER INC.

SCALE: NTS

SHEET: 1 OF 1

REV: A