



# NANO X WARM DIM

Micro Profile Exterior LED Task and Cove Fixture with Warm Dim

Customer: \_\_\_\_\_ Date: \_\_\_\_\_

Project: \_\_\_\_\_



<b>Wattage</b>	3W, 6W or 10W per linear ft.
<b>Input Voltage</b>	90-120V or 230-277V
<b>Control</b>	Forward/Reverse Phase Line Dimmer, Compatible with 0-10V, DALI, DMX*
<b>LED Spacing</b>	0.65" on Center
<b>Length</b>	12-72", in 6" increment
<b>Total Width</b>	1.21" Fixed Clip
<b>Total Height</b>	2.08"
<b>Input Current</b>	54mA @ 120V, 24mA @ 277V
<b>Mounting</b>	Fixed, Hinge
<b>Available Optics</b>	15x40°, 120°
<b>Finish</b>	Clear Anodized Aluminum
<b>Color Options</b>	2000K-3000K - (Contact Factory for other options)
<b>Max Run</b>	76ft. @ 120V, 156ft. @ 277V
<b>Rating</b>	IP50, IP67
<b>CRI</b>	90+ CRI
<b>Material</b>	Anodized Aluminum
<b>Custom</b>	Contact Factory
<b>Dimming</b>	Patented CleanDim® Technology ensures even dimming from 0-100%.
<b>Environmental</b>	Operating temperature: -40°F-140°F Ambient(-40°C-60°C)** Storage temperature: -40°F-140°F Ambient indoor fixtures operation limited to =<50% relative humidity

\*Uses Boca SDS Module for 0-10V, Dali, or DMX Dimming.  
\*\* Military spec available under special request-lead times may be impacted.




## PRODUCT SPECIFICATIONS:

	WATTAGE	COLOR OPTION	VOLTAGE	OPTIC	FINISH	MOUNTING	LENS	BAFFLE* (Not Available with 10° Optics)	REFLECTOR
<b>Nano Warm Dim</b>		<b>2000K-3000K</b>							
	<b>3W</b> <b>6W</b> <b>10W</b>	(Contact Factory for other Options)	<b>120V</b> <b>277V</b>	<b>15°x40°</b> <b>120°</b>	<b>W</b> White <b>B</b> Black	<b>F</b> Fixed <b>H</b> Hinge	<b>C</b> Clear <b>CLD</b> Clear Light Diffused (Not Available with Optics) <b>HD</b> Heavy Diffused (Not Available with Optics)	<b>SQ</b> Square <b>ASYM</b> Asymmetric  * Not Available with 10° Optics	<b>N</b> No <b>Y</b> Yes (Not Available with Optics)
<b>ACCESSORY</b>	<b>KNIFE EDGE COVE</b>								
<b>T</b> Track Mount (Only available with Fixed Mounting)	<b>Y</b> YES <b>N</b> NO								

## DIMENSIONS:

Note: Allow for 1/4" for each end cap and 1.25" for power feed cable.

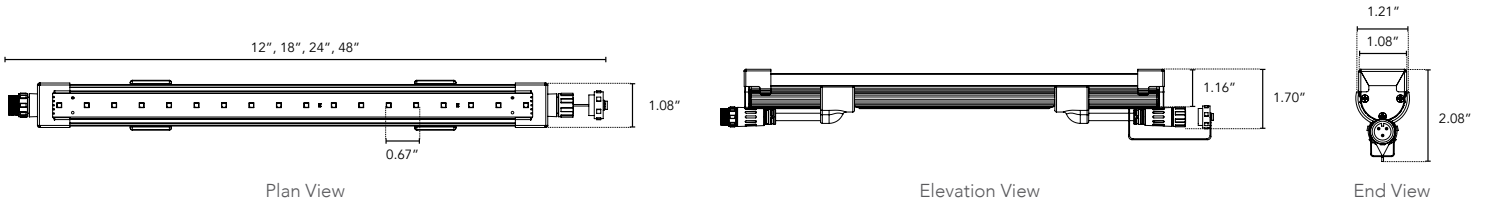

## MOUNTING INFORMATION:

For vertical installation and installations above 4' please contact the factory for specific mounting instructions.

