



HPCCS

Small Profile Color Changing LED Fixture

Customer: _____ Date: _____ Type: _____

Project: _____



*Contact factory for Extreme Enironment Installations

Wattage	22W per linear ft.
Input Voltage	90-120V, 230-277V
Control	Standard DMX 512, WA5 required for wireless transmission
LED Spacing	1.0" on center
Length	1 ft., 4 ft.
Total Height	2.54" (not including clip)
Total Width	2.70"
Color Options	Alternating RGB, Triple Diode RGB, White Mixing
Mounting	Fixed, Hinge or Vandal
Available Optics	10°x10°, 30°x30°, 60°x 60°, 10°x30°, 10°x60°, 30°x60°, 120°x120°
Rating	IP50, IP65, IP68
CRI	90+ for White Mix Only
Materials	Anodized Aluminum Housing
Custom	Contact Factroy
Power Cable	UL Standard 10 ft.
Environmental	Operating temperature: -40°F-140°F Ambient(-40°C-60°C)** Storage temperature: -40°F-140°F Ambient indoor fixtures operation limited to =<50% relative humidity

*Custom wattage available upon request.

Title 24 compliant fixture not to exceed 18 watts / 4ft fixture.

** Military spec available under special request-lead times may be impacted.

PRODUCT SPECIFICATIONS:


PRODUCT	COLOR OPTION	VOLTAGE	OPTIC	FINISH	LOCATION	MOUNTING	LENS	WHITE MIXING OPTIONS	HEXCELL
HPCCS									
	RGB TRGB Triple Diode (120° only) WM White Color Mixing	120V 277V	10°x10° 30°x30° 60°x60° 10°x30° 10°x60° 30°x60° 120°x120°	A Clear Anodized Aluminum	I Interior-IP50 E Exterior-IP67	F Fixed H Hinge V Vandal Resistant	C Clear	2700K 3000K 3500K 4000K 5000K Amber	Y Yes N No
	*See White Mix Options							If specifying WM indicate white options here: (Up to 3 different options can be specified)	

Boca Lighting and Controls · www.Boca.Lighting · Phone: 561-989-5338 · Fax: 561-982-8323


We are constantly improving our fixtures and reserve the right to change options and specifications. For specific requirements, contact your Boca Lighting and Controls sales representative. This product complies with IES LM-79-08 testing procedures and relevant standards. All products proudly manufactured in the USA. All rights reserved. All names and trademarks are property of their respective owners. © 2024 Boca Lighting and Controls

REV09252025

DIMENSIONS:

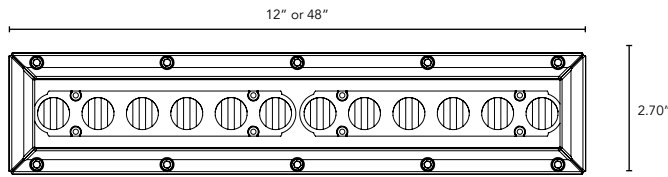

Plan View

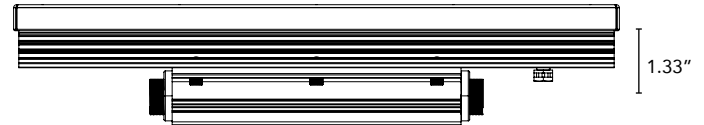


Elevation View


MOUNTING INFORMATION:

For vertical installation and installations above 4' please contact the factory for specific mounting instructions.


Hinge

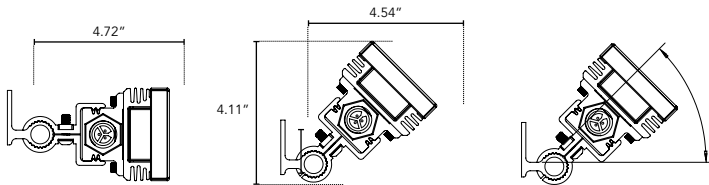


Swivel



Fixed



Vandal Resistant



LIGHTSOURCE REPORT

White w/Clear Glass Lens

CIE Colorimetric Parameters
CCT: Tc = 3088K

Photometric Parameters
Luminous Flux: 634.40 lm
Efficiency: 59.46 lm/W

White w/Clear Glass Lens

RGBW w/Clear Glass Lens
CCT: Tc = 4392K

Photometric Parameters
Luminous Flux: 922.16 lm
Efficiency: 34.65 lm/W