



# NANO MIX-EXT

Triple Diode DMX Controlled Line Voltage  
Small Profile Linear LED Fixture



Customer: \_\_\_\_\_ Date: \_\_\_\_\_

Project: \_\_\_\_\_

<b>Wattage</b>	8W per linear ft.
<b>Input Voltage</b>	90-120V, 277V
<b>Control</b>	NanoRouter-DMX. Operates with standard 512 DMX.
<b>Power Cable</b>	UL Standard 10 ft.
<b>Length</b>	12", 18", 24", 48"
<b>Total Width</b>	1.08" Fixed Clip
<b>Total Height</b>	2.08" (not including clip)
<b>Input Current</b>	54mA @ 120V, 24mA @ 277V
<b>Mounting</b>	Fixed Short, Fixed Tall, Hinge
<b>Available Optics</b>	15°x40°, 120°
<b>Finish</b>	Clear Anodized Aluminum
<b>Color Options</b>	RGBW, 2000K, 2400K, 2700K, 3000K, 3500K, 4000K, 5000K, 6500K, Red, Blue, Amber, Green
<b>CRI</b>	90 + CRI
<b>Rating</b>	IP50, IP67
<b>Material</b>	Anodized Aluminum
<b>Custom</b>	Contact Factory
<b>Max Run</b>	40ft. @ 120V
<b>Environmental</b>	Operating temperature:-40°F-140°F Ambient(-40°C-60°C)** Storage temperature: -40°F-140°F Ambient indoor fixtures operation limited to =<50% relative humidity


\*\* Military spec available under special request-lead times may be impacted.



## PRODUCT SPECIFICATIONS:


	COLOR OPTION	OPTIC	VOLTAGE	FINISH	MOUNTING	LENS	BAFFLE <small>(Not Available with 10° Optics)</small>	REFLECTOR
<b>NanoMix</b>								<b>N</b>
	<b>RGB(W)</b>	<b>15°x40°</b>	<b>120V</b>	<b>A</b> Clear Anodized	<b>FS</b> Fixed Short	<b>CLD</b> Clear Light Diffused	<b>SQ</b> Square	<b>N</b> No
	<b>2000K</b>	<b>120°</b>	<b>277V</b>	<b>C</b> Custom	<b>FT</b> Fixed Tall	<b>C</b> Clear	<b>ASYM</b> Asymmetric	
	<b>2400K</b>		<b>UNIV</b>		<b>H</b> Hinge			
	<b>2700K</b>							
	<b>3000K</b>							
	<b>3500K</b>							
	<b>4000K</b>							
	<b>5000K</b>							
	<b>6500K</b>							
	<b>Red</b>							
	<b>Blue</b>							
	<b>Amber</b>							
	<b>Green</b>							

## DIMENSIONS:

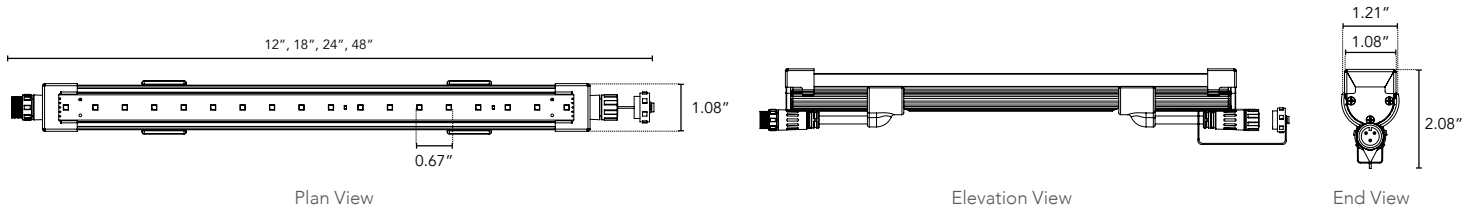


## MOUNTING INFORMATION:

For vertical installation and installations above 4' please contact the factory for specific mounting instructions.



Fixed



Hinge

## OUTPUT:

Color Temperature (K)	Wattage	Lumens	LM/W
2000	6	365	61
2400	6	470	79
2700	6	560	94
3000	6	695	116
3500	6	760	127
4000	6	800	134