



HPFB

Medium Profile Color Changing LED Fixture

Customer: _____ Date: _____

Project: _____



Wattage	32W per linear ft.*
Input Voltage	120 V or 277 V
Control	Standard DMX 512, WA5 required for wireless transmission
LED Spacing	1.0" on center
Length	1 ft., or 4 ft.
Total Height	2.51" (not including clip)
Total Width	4.19"
Color Options	RGB, RGBW, RGB/WWW, RGB/WWA
Mounting	Fixed, Swivel, or Vandal Resistant
Available Optics	10°, 30°, 60°, 10°x60°, 30°x60°
Rating	IP50, IP67, IP69K
CRI	90+ for White Mixing Only
Power Cable	UL Standard 10 ft.
Material	Anodize Aluminum Housing
Lens	Clear, Diffused (interior only)
Custom	Contact Factory
Environmental	Operating temperature: -40°F-140°F Ambient(-40°C-60°C)** Storage temperature: -40°F-140°F Ambient indoor fixtures operation limited to =<50% relative humidity

*Custom wattage available upon request. Title 24 compliant fixture not to exceed 18 watts / 4ft fixture.

** Military spec available under special request-lead times may be impacted.



*Contact factory for Extreme Environment Installations

PRODUCT SPECIFICATIONS:

COLOR OPTION	OPTIC	VOLTAGE	FINISH	LOCATION	MOUNTING
HPFB			A		
RGB	10°	120V	A Clear Anodized Aluminum	I Interior-IP50 E Exterior-IP67	F Fixed S Swivel V Vandal Resistant
RGBW color & white (See Options)	30°	277V			
RGB/WWW	60°				
RGB/WWA	10°x60° 30°x60°				

WHITE MIXING OPTIONS

LENS

CONTROLS

HEXCELL

If specifying RGBW indicate white options here:
(Up to 3 different options can be specified)


- 2700K
- 3000K
- 3500K
- 4000K
- 5000K
- Amber

- C** Clear
- D** Diffused
(Interior Use Only)

- 3** 3 Channel DMX
- 4** 4 Channel DMX
- 6** 6 Channel DMX
- 8** 8 Channel DMX

- Y** Yes
- N** No


DIMENSIONS:

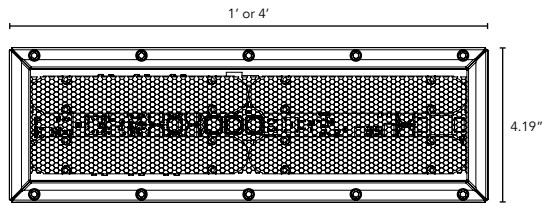

Plan View



Elevation View



End View

MOUNTING INFORMATION:

For vertical installation and installations above 4' please contact the factory for specific mounting instructions.

