



MONOBOOST

Boca Wireless Family: Wireless Repeater

Customer: _____ Date: _____

Project: _____



Input Voltage	USB, 5V
Input Port	W-DMX
Output Ports	W-DMX/ RJ45
Frequency	2.4GHZ
Total Width	2"
Total Height	0.7"
Environmental	Operating temperature: -40°F-140°F Ambient(-40°C-60°C)** Storage temperature: -40°F-140°F Ambient indoor fixtures operation limited to =<50% relative humidity


** Military spec available under special request-lead times may be impacted.




PRODUCT SPECIFICATIONS:

	INPUT CABLE	VOLTAGE	FINISH	ANTENNA
MonoBoost	Mini USB	5V	Clear AL	DA Directional RA Remote


DIMENSIONS:

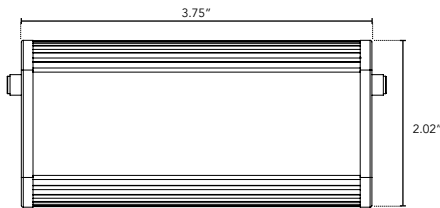

Plan View



Elevation View



End Cap

Boca Lighting and Controls · www.Boca.Lighting · Phone: 561-989-5338 · Fax: 561-982-8323

We are constantly improving our fixtures and reserve the right to change options and specifications. For specific requirements, contact your Boca Lighting and Controls sales representative. This product complies with IES LM-79-08 testing procedures and relevant standards. All products proudly manufactured in the USA. All rights reserved. All names and trademarks are property of their respective owners. © 2024 Boca Lighting and Controls

REV10302024

MATRIX:

CONTROLS

	SDS10V	SDS-DMX	ND1-10V	NDT-10V	N-RFO	NanoRouter	NanoRouter-X	WA5	Monolink-W10V	MonoBoost	MonoDMXTX	PDMXC-T
NanoHD	●	●	●		●	●	●		●			
NanoWarmDim	●	●	●		●	●	●		●			
NanoLume	●	●	●		●	●	●		●			
NanoX	●	●	●		●	●	●		●			
HPNFC-HO	●	●										
HPNLS-HO	●	●										
HPNLS-LO	●	●										
Lumeline	●	●										
Niche-HV	●	●										
SBL-MC	●	●										
NanoMix						●	●					
HPNLS-MIX						●	●					
Tri-Light HV						●	●					
NanoTune			●	●	●	●						
HPCCS					●	●	●		●	●	●	
HPFB					●	●	●		●	●	●	
SBL-MIX					●	●	●		●	●	●	
N-RFO					●	●	●		●	●	●	
NanoRouter					●	●	●		●	●	●	
NanoRouter-X					●	●	●		●	●	●	
Monolink-W10V					●	●	●		●	●	●	
MonoBoost					●	●	●		●	●	●	
WA5												●
SDS-DMX					●	●	●		●	●	●	
SDS-10V									●			

FIXTURES