



# MONO-DMXTX

Boca Wireless Family: Wireless Transmitter

Customer: \_\_\_\_\_ Date: \_\_\_\_\_

Project: \_\_\_\_\_



<b>Input Voltage</b>	USB, 5V
<b>Input Port</b>	RJ45
<b>Output Ports</b>	W-DMX
<b>Frequency</b>	2.4GHZ
<b>Total Width</b>	2"
<b>Total Height</b>	0.7"
<b>Environmental</b>	Operating temperature: -40°F-140°F Ambient(-40°C-60°C)** Storage temperature: -40°F-140°F Ambient indoor fixtures operation limited to =<50% relative humidity


\*\* Military spec available under special request-lead times may be impacted.




## PRODUCT SPECIFICATIONS:

	INPUT CABLE	VOLTAGE	FINISH	ANTENNA
<b>MonoDMXTx</b>	<b>Mini USB</b>	<b>5V</b>	<b>Clear AL</b>	<b>DA</b> Directional <b>RA</b> Remote <b>SA</b> Standard Low Profile


## DIMENSIONS:

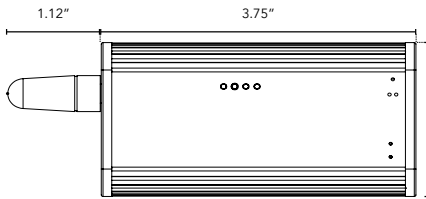

Plan View



Elevation View



End Cap

**MATRIX:**

CONTROLS

	SDS10V	SDS-DMX	NDI-10V	NDT-10V	N-RFO	NanoRouter	NanoRouter-X	WA5	Monolink-W10V	MonoBoost	MONO-DMXTX	PDMXC-T
NanoHD	●	●	●		●	●	●		●			
NanoWarmDim	●	●	●		●	●	●		●			
NanoLume	●	●	●		●	●	●		●			
NanoX	●	●	●		●	●	●		●			
HPNFC-HO	●	●										
HPNLS-HO	●	●										
HPNLS-LO	●	●										
Lumeline	●	●										
Niche-HV	●	●										
SBL-MC	●	●										
NanoMix						●	●					
HPNLS-MIX						●	●					
Tri-Light HV						●	●					
NanoTune			●	●		●	●					
HPCCS						●	●	●		●	●	●
HPFB						●	●	●		●	●	●
SBL-MIX						●	●	●		●	●	●
N-RFO						●	●	●		●	●	●
NanoRouter						●	●	●		●	●	●
NanoRouter-X						●	●	●		●	●	●
Monolink-W10V						●	●	●		●	●	●
MonoBoost						●	●	●		●	●	●
WA5												●
SDS-DMX						●	●	●		●	●	●
SDS-10V									●			

FIXTURES