



LUMELINE DB

Direct View Linear LED Strip Fixture



Customer: _____ Date: _____

Project: _____

Wattage	4W or 8W per linear ft.
Input Voltage	90-120V or 230-277V
Control	Forward/Reverse Phase Line Dimmer 0-10V, DALI, DMX*
LED Spacing	0.66" on Center
Length	12", 18", 24", 36", 48", 96"
Total Height	1.27" (not including clip)
Total Width	1.68"
Color Options	2000K, 2400K, 2700K, 3000K, 3500K, 4000K, 5000K
Mounting	Fixed, Swivel, Hinge, 3" Arc or 6" Arc, Vandal
Available Optics	120°
Rating	IP50, IP67, IP69K
CRI	90+ CRI
Power Cable	UL Standard 10 ft.
Finish	Black, White, Grey
Material	Anodized Aluminum
Dimming	Patented CleanDim® Technology ensures even dimming from 0-100%.
Max Run	56ft @ 120V or 120ft @ 277V
Environmental	Operating temperature: -40°F-140°F Ambient(-40°C-60°C)** Storage temperature: -40°F-140°F Ambient indoor fixtures operation limited to =<50% relative humidity

*Use Boca SDS module for 0-10V DALI or DMX Dimming.
** Military spec available under special request-lead times may be impacted.




*Contact Factory for Exterior Installations

PRODUCT SPECIFICATIONS:


	WATTAGE	COLOR OPTION	OPTIC	VOLTAGE	FINISH	LOCATION	MOUNTING	LENS	OPTIONS
LUMELINE			120°						
	4W 8W	2000K 2400K 2700K 3000K 3500K 4000K 5000K		120V 277V	W White B Black G Gray	I Interior-IP50 E Exterior-IP67 K Extreme Environment-IP69K	F Fixed S Swivel 3Arc 3" Arc Swivel 6Arc 6" Arc Swivel V Vandal Resistant	C Clear D Diffused SI Satin Ice (Interior Use Only) OP Opal White	SB Square Baffle ASYM Asymmetric Baffle SKB Kicker Baffle

DIMENSIONS:

For vertical installation and installations above 4' please contact the factory for specific mounting instructions.

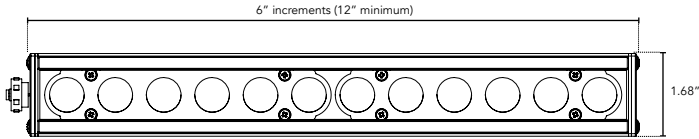


Plan View

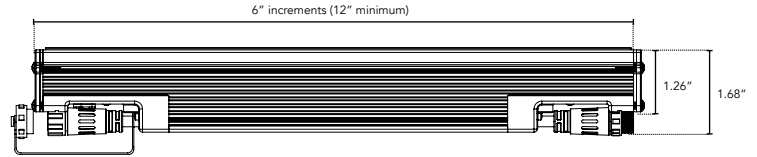


Elevation View

MOUNTING INFORMATION:


Note: Fixtures 1-2ft, Place clips 3" from edge as shown. Fixtures more than 2ft., Place clips 3.5" from edges as shown.

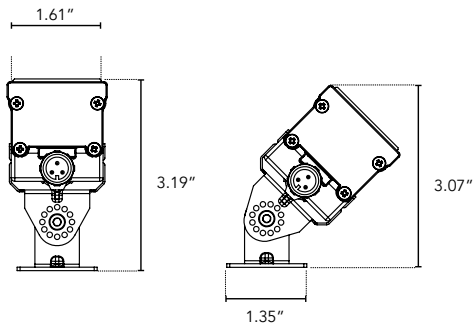

Swivel

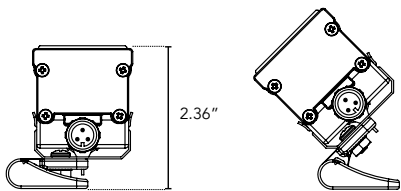

Hinge

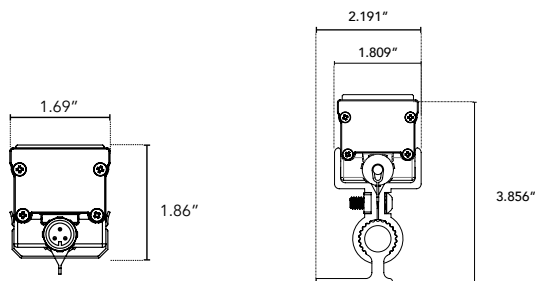

Fixed

Vandal Resistant

LENS OPTIONS:

DIFFUSED GLASS

- 87% transmission
- Lens is 1/8" (.09) thick, adds 1/16" to overall height of fixture
- Additional charges apply

SATIN ICE

- Best for direct view use
- 42% transmission
- Lens is 1/4" (.25) thick, adds 1/8" to overall height of fixture
- Additional charges apply