



LUMELINE

Direct View Linear LED Strip Fixture



Customer: _____ Date: _____

Project: _____

Wattage	4W or 8W per linear ft.
Input Voltage	90-120V or 230-277V
Control	Forward/Reverse Phase Line Dimmer 0-10V, DALI, DMX*
LED Spacing	0.66" on center
Length	12"-96", 6" increments. Allow 1/4" for each end cap, 2" for power feed cable.
Total Height	1.24" (not including clip), Satin Ice Lens adds 1/8"
Total Width	1.68"
Color Options	2000K, 2400K, 2700K, 3000K, 3500K, 4000K, 5000K
Mounting	Fixed, Swivel, 3" Arc or 6" Arc
Available Optics	120°
Rating	IP50, IP67*, IP69K*
CRI	90+ CRI
Power Cable	UL Standard 10 ft.
Finish	Black, White, Grey
Material	Anodized Aluminum
Custom	Contact Factory
Dimming	Patented CleanDim® Technology ensures even dimming from 0-100%.
Max Run	56ft @120V or 120ft @277V
Environmental	Operating temperature: -40°F-140°F Ambient(-40°C-60°C)** Storage temperature: -40°F-140°F Ambient indoor fixtures operation limited to =<50% relative humidity

*Uses Boca SDS Module for 0-10V, DALI, or DMX Dimming.
** Military spec available under special request-lead times may be impacted.




*Contact Factory for Exterior Installations

PRODUCT SPECIFICATIONS:




	WATTAGE	COLOR OPTION	OPTIC	VOLTAGE	FINISH	LOCATION	MOUNTING	LENS	OPTIONS
LUMELINE			120°			I			
	4W 8W	2000K 2400K 2700K 3000K 3500K 4000K 5000K		120V 277V	W White B Black G Gray	I Interior-IP50 *Contact factory for IP67 and IP69K.	F Fixed S Swivel 3Arc 3" Arc Swivel 6Arc 6" Arc Swivel	C Clear D Diffused SI Satin Ice (Interior Use Only) OW Opal White (Exterior Use Only)	SB Square Baffle ASYM Asymmetric Baffle SKB Kicker Baffle

DIMENSIONS:

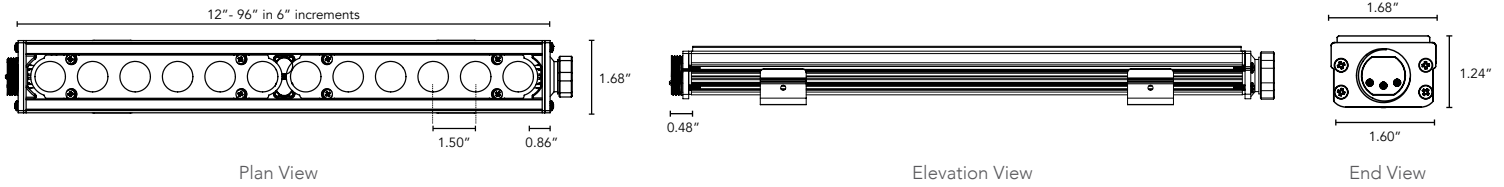

MOUNTING INFORMATION:

For vertical installation and installations above 4' please contact the factory for specific mounting instructions.

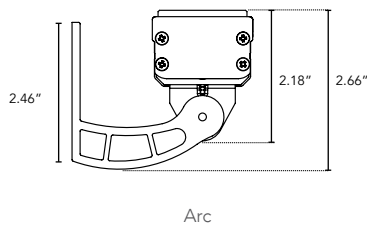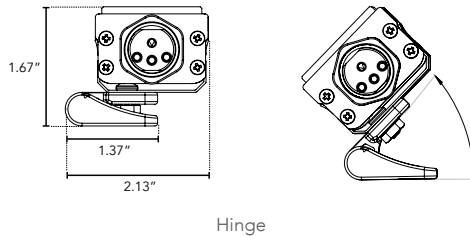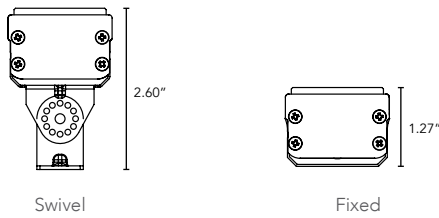

LENS OPTIONS:

DIFFUSED GLASS

- 87% transmission
- Lens is 1/8" (.09) thick, adds 1/16" to overall height of fixture
- Additional charges apply

SATIN ICE

- Best for direct view use. Interior use only.
- 42% transmission
- Lens is 1/4" (.25) thick, adds 1/8" to overall height of fixture
- Additional charges apply