




SBL-MIX

High Intensity Color or White LED Fixture

Customer: _____ Date: _____

Project: _____

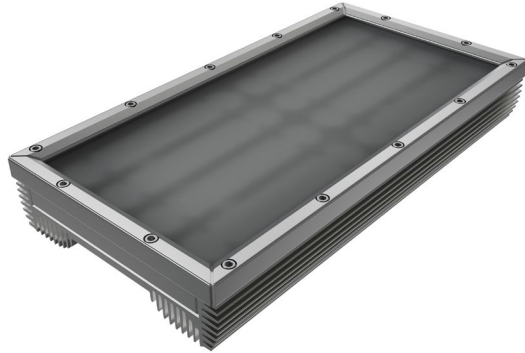

Wattage	65W per linear ft
Input Voltage	90-120 VAC , 230-277 VAC
Control	Standard DMX 512, Wireless DMX*
LED Spacing	1.0" on Center
Length	1 ft, 2 ft or 4 ft
Total Height	2.62"
Total Width	6.74"
Color Options	RGB, White Mixing
Mounting	Fixed or Swivel
Available Optics	10°, 30°, 60°, 10° x 60°, 30° x 60°, 120°
Rating	IP50, IP67, IP69K*
DMX	Wireless
Power Cable	UL Standard 10 ft
White Mixing Options	2700K, 3000K, 3500K, 5000K, Amber
Environmental	Operating temperature: -40°F-140°F Ambient (-40°C-60°C)** Storage temperature: -40°F-140°F Ambient indoor fixtures operation limited to =<50% relative humidity



*Contact factory for Extreme Environment Installations.

*Use Boca Nanorouter/Monorouter Wireless DMX Control.


**Military spec available under special request-lead times may be impacted.

PRODUCT SPECIFICATIONS:

		COLOR OPTION	OPTIC	VOLTAGE	FINISH	LOCATION	MOUNTING	WHITE MIXING OPTIONS
SBL	MIX				A			
		RGB - 3 Channel	10°	120V	A Clear Anodized	I Interior-IP50	F Fixed	If specifying WM or RGBW indicate white options here: (Up to 3 different options can be specified)
		RGBW - 4 Channel*	30°	277V	Aluminum	E Exterior-IP67	S Swivel	
		RGB/WM - 6 Channel*	60°					
		RGBW/WM - 8 Channel*	10°x 60°					
		WM White Mix - 3 Channel	30°x 60°					
			120°					2700K 3000K 3500K 4000K 5000K Amber
		*White or Mixing - Select Options						
		HEXCELL						

Y Yes
N No

DIMENSIONS:

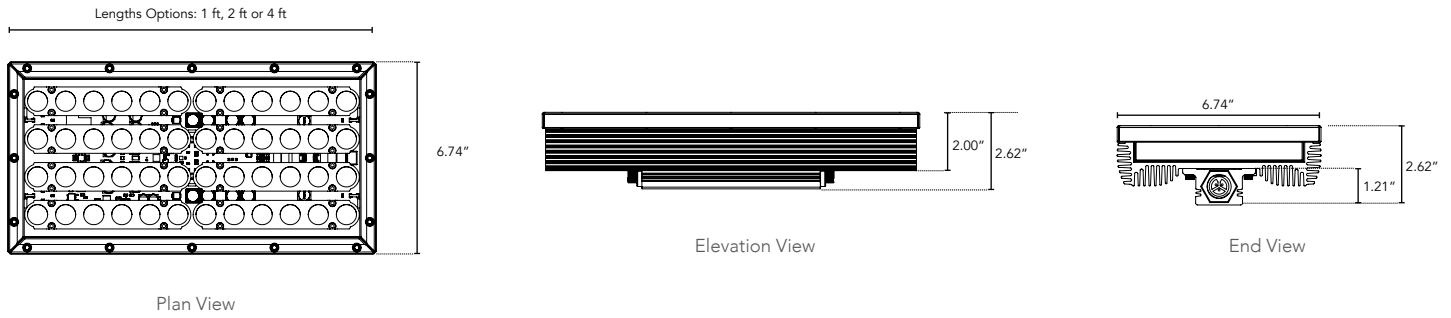

MOUNTING INFORMATION:

For vertical installation and installations above 4' please contact the factory for specific mounting instructions.

