



# SBL-MIX


High Intensity Color or White LED Fixture

Customer:

Date:

Type:

Project:

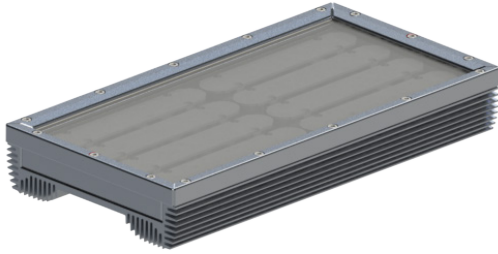

- Compact, variable light fixture for dry, damp or wet location use.
- Fixture comes in 1ft, 2ft and 4ft options.
- Many options in optics, color temperature and accessories to suit a range of projects. Call factory for additional options.
- UL Listed for dry or damp or wet location (model dependent).
- Clear anodized aluminum housing with a durable finish ensuring it is weather and abrasion resistant.
- Uses standard DMX 512 show controls. Wireless DMX operation with Boca Nanorouter/Monorouter
- WA5 required for wireless transmission.
- 6 channel version available.
- Simple installation using conventional power wiring.
- Contact Boca Flasher for tips with custom installations.




## PRODUCT SPECIFICATIONS:

		COLOR OPTION	OPTIC	VOLTAGE	FINISH	LOCATION	MOUNTING	WHITE MIXING OPTIONS
SBL	MIX				A			
		RGB	10°	120V	A Clear Anodized Aluminum	I Interior-IP50	F Fixed	If specifying WM indicate white options here: (Up to 3 different options can be specified) <b>2700K</b> <b>3000K</b> <b>3500K</b> <b>4000K</b> <b>5000K</b> <b>Amber</b>
		WM White Color Mixing - See Options	30°	277V		E Exterior-IP65	S Swivel	
			60°			W Wet-IP68		
			10°x 60°					
			30°x 60°					
			120°					
HEXCELL								
Y	Yes							
N	No							

## DIMENSIONS:


Plan View

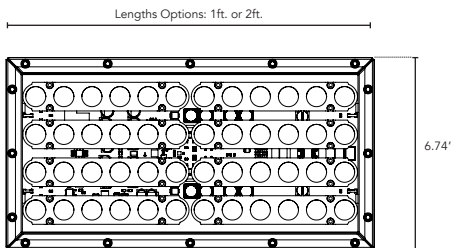

Elevation View



End View

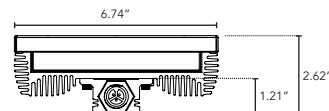

# SBL-MIX

High Intensity Color or White LED Fixture

## TECHNICAL SPECIFICATIONS:


WATTAGE	65 watts per linear ft.
INPUT VOLTAGE	90-120 VAC 230-277 VAC
CONTROL	Standard DMX 512 Wireless DMX
LED SPACING	1.0" on center
LENGTH	1 ft, 2 ft, or 4 ft
TOTAL HEIGHT	3.11"
TOTAL WIDTH	7.50"
COLOR OPTIONS	RGB, White Mixing
MOUNTING	Fixed or Swivel
AVAILABLE OPTICS	10°, 30°, 60°, 10° x 60°, 30° x 60°, 120°
RATING	IP50, IP65, IP68
DMX	Wireless
POWER CABLE	UL Standard 10 ft.
WHITE MIXING OPTIONS	2700K, 3000K, 3500K, 5000K, Amber
ENVIRONMENTAL	Operating temperature -40°F-140°F Ambient (-40°C-60°C)** Storage temperature -40°F-140°F Ambient indoor fixtures operation limited to =<50% relative humidity

\*Use Boca Nanorouter/Monorouter Wireless DMX Control.

\* Military spec available under special request-lead times may be impacted.

## MOUNTING INFORMATION:

- For vertical installation please contact the factory for specific mounting instructions.
- For installations above 4' please contact the factory.

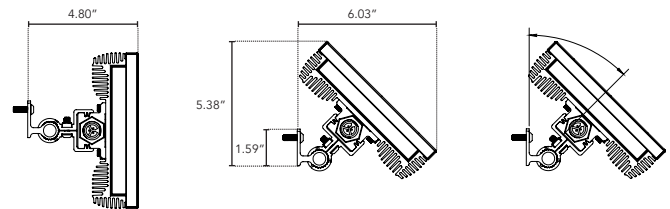

## LUMINAIRE INFORMATION:

IES Files Pending

- Specific Files Available On Request