



HP SUBMERSIBLE

Solid Color Submersible LED Light Strips

Customer: _____ Date: _____

Project: _____



Wattage	6W per linear ft.
Input Voltage	12-48VAC
Control	Standard Magnetic Low Voltage Dimming
LED Spacing	1.5" on center
Tube Length	15" - 123" in 6" increments, 10' maximum length
Total Height	2.01" (including clip)
Total Width	2.10" (including clip)
Total Diameter	1.75"
Color Options	2700K,3000K, 3500K, 4000K, 5000K, Amber, Red, Green, Blue
Available Optics	10°, 30°, 60°, 10°x60°, 30°x60°, 120°
Rating	IP50, IP67
CRI	90+ CRI
Power Cable	Variable
Materials	Tempered polycarbonate housing tube, all metal parts are Teflon coated
Environmental	Operating temperature: -40°F-140°F Ambient(-40°C-60°C)** Storage temperature: -40°F-140°F Ambient indoor fixtures operation limited to =<50% relative humidity


** Military spec available under special request-lead times may be impacted.




PRODUCT SPECIFICATIONS:

HPSUB		RT	COLOR OPTION	OPTIC	TRANSFORMER VOLTAGE	HOUSING	OPTION
			2700K	10°	120V	UW	UW Underwater Tube
			3000K	30°	277V		
			3500K	60°			
			4000K	10°x60°	If ordering 17VDC fixture, make note here and contact factory - (Fixture is 12-48VAC)		
			5000K	30°x60°			
			Amber	120°			
			Red				
			Green				
			Blue				


DIMENSIONS:

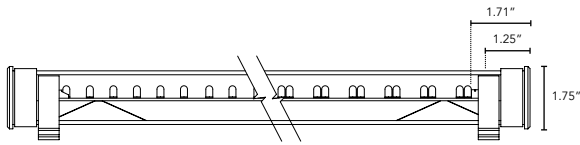

Elevation View



End Cap



Section In Tube

MOUNTING INFORMATION:

Fixed

