NANO X-TW

Tuneable White Linear LED Fixture
Suited for Exterior or Damp Locations

Customer: Date: Type:

Project:





Wattage	6W per linear ft.
Input Voltage	90-120V
Control	Forward/Reverse Phase Line Dimmer 0-10V, DALI, DMX*
Power Cable	UL Standard 10 ft.
Length	1 ft., 1.5 ft., 2ft., 4ft.
Total Width	1.21" Fixed Clip
Total Height	2.08"
Color Options	1800K**, 2000K, 2200K,2400K, 2700K, 3000K, 3500K, 4000K, 5000K
Mounting	Fixed, Hinge
Available Optics	15°×40°, 45°, 60°, 120°x 120°, ASYM, WW
Rating	IP50, IP67
Material	Clear Anodized Aluminum
Custom	Contact Factory
Dimming	Patented CleanDim® Technology ensures even dimming from 0-100%.
CRI	90+ CRI
Finish	Clear Anodized
Max Run	76ft. @ 120V, 156ft. @ 227V
Environmental	Operating temperature: -40°F-140°F Ambient(-40°C-60°C)** Storage temperature: -40°F-140°F Ambient indoor fixtures operation limited to =<50% relative humidity

*Uses Boca SDS Module for 0-10V, Dali, or DMX Dimming.
*** Military spec available under special request-lead times may be impacted.

Key Features

- Tunable White fixture for exterior and interior damp-location applications.
- Patented CleanDim® Technology delivers even 0–100% dimming.
- Expanded optics include 45°, 60°, Asymmetric and Wall Wash.

PRODUCT SPECIFICATIONS:

		COLOR OPTION									
PRODUCT	WATTAGE	LOW	MEDIUM	HIGH	VOLTAGE	OPTIC	FINISH	MOUNTING	LENS	BAFFLE	CONTROL
NANOX-TW	**6W**				**90V-120V**						
	6W	**1800K** **2000K** **2200K** **2400K** **2700K** **3000K** **3500K** **4000K** **5000K** **6500K**	**1800K** **2000K** **2200K** **2400K** **2700K** **3000K** **3500K** **4000K** **5000K** **6500K**	**1800K** **2000K** **2200K** **2400K** **2700K** **3000K** **3500K** **4000K** **5000K** **6500K**	**90V-120V**	**15°x40°** **45°** **60°** **120°x120°** **ASYM** Asymmetric **WW** Wall Wash	**A** Clear Anodized Aluminum **N** Natatorium Finish* **C** Custom* *Additional charges may apply	**F** Fixed **H** Hinge	**C** Clear **CLD*** Clear Light Diffused **HD*** Heavy Diffused *Not Available with 10°x10° OR 15°X45° Optics	**SB** Square Baffle **ASYM** Asymmetric Baffle **N** No Baffe	**0-10V** **DMX** **DALI**

Boca Lighting and Controls · www.Boca.Lighting · Phone: 561-989-5338 · Fax: 561-982-8323


We are constantly improving our fixtures and reserve the right to change options and specifications. For specific requirements, contact your Boca Lighting and Controls sales representative. This product complies with IES LM-79-08 testing procedures and relevant standards. All products proudly manufactured in the USA. All rights reserved. All names and trademarks are property of their respective owners. © 2024 Boca Lighting and Controls

NANO X-TW


Tuneable White Light Line Voltage Small Profile Linear LED Fixture

DIMENSIONS:


Note: Allow for 1/4”for each end cap and 1.25” for power feed cable.

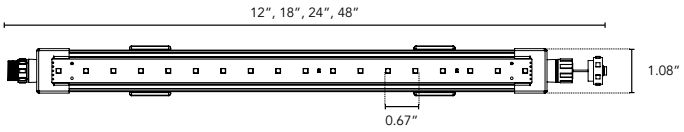

Plan View




Elevation View




End View

MOUNTING INFORMATION:

For vertical installation and installations above 4’ please contact the factory for specific mounting instructions.



Fixed



Hinge

Boca Lighting and Controls · www.Boca.Lighting · Phone: 561-989-5338 · Fax: 561-982-8323

We are constantly improving our fixtures and reserve the right to change options and specifications. For specific requirements, contact your Boca Lighting and Controls sales representative. This product complies with IES LM-79-08 testing procedures and relevant standards. All products proudly manufactured in the USA. All rights reserved. All names and trademarks are property of their respective owners. © 2024 Boca Lighting and Controls

REV11032026