



HPFB

Medium Profile Color Changing LED Fixture

Customer: _____ Date: _____ Type: _____

Project: _____



Wattage	32W per linear ft.*
Input Voltage	120 V or 277 V
Control	Standard DMX 512, WAS required for wireless transmission
LED Spacing	1.0" on center
Length	1 ft., or 4 ft.
Total Height	2.51" (not including clip)
Total Width	4.19"
Color Options	RGB, RGBW, RGB/WWW, RGB/WWA
Mounting	Fixed, Swivel, or Vandal Resistant
Available Optics	10°x10°, 30°x30°, 60°x 60°, 10°x30°, 10°x60°, 30°x60°, 120°x120°
Rating	IP50, IP67, IP69K
CRI	90+ for White Mixing Only
Power Cable	UL Standard 10 ft.
Material	Anodize Aluminum Housing
Lens	Clear, Diffused (interior only)
Custom	Contact Factory
Environmental	Operating temperature: -40°F-140°F Ambient(-40°C-60°C)** Storage temperature: -40°F-140°F Ambient indoor fixtures operation limited to =<50% relative humidity

*Custom wattage available upon request. Title 24 compliant fixture not to exceed 18 watts / 4ft fixture.

** Military spec available under special request-lead times may be impacted.




*Contact factory for Extreme Enironment Installations


PRODUCT SPECIFICATIONS:

PRODUCT	COLOR OPTION	VOLTAGE	OPTIC	FINISH	LOCATION	MOUNTING	LENS	WHITE MIXING OPTIONS	CONTROLS	HEXCELL
HPFB										
	RGB RGBW color & white (See Options) RGB/WWW RGB/WWA	120V 277V	10°x10° 30°x30° 60°x60° 10°x30° 10°x60° 30°x60°	A Clear Anodized Aluminum	I Interi- or-IP50 E Exteri- or-IP67	F Fixed H Hinge V Vandal Resistant	C Clear D Diffused*	2700K 3000K 3500K 4000K 5000K Amber	3 3 Channel DMX 4 4 Channel DMX 6 6 Channel DMX 8 8 Channel DMX	Y Yes N No
							*Interior Use Only	If specifying WM indicate white options here: (Up to 3 different options can be specified)		


DIMENSIONS:

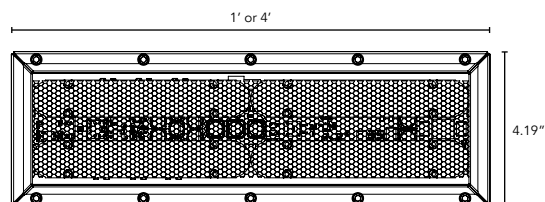

Plan View



Elevation View

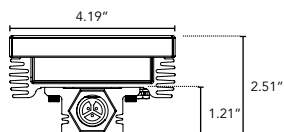

End View

MOUNTING INFORMATION:

For vertical installation and installations above 4' please contact the factory for specific mounting instructions.

