

TASK
Shallow Profile LED Fixture



Customer: _____ Date: _____

Project: _____

Wattage/Foot	ON: 10W / Mid: 5W / Lo: 3W Clean Boost: 15 (20 minute time out on CB)
Input Voltage	90-120VAC, 230-277VAC
Input Current	Model Dependent
Control	Integral Touch Dimmer, Vacancy/Occupancy Sensor Standard* - Sensor range of either 85° or 120°.
LED Spacing	1"x1.5" on Center
Length	Master fixture 16" - 88": Satellite fixtures 13" - 91", 6" increments. Allow 1" for each L-Bracket and 2" for power feed cable.
Total Height	0.85" (not including clip)
Total Width	3.03"
Color Options	2700K, 3000K, 3500K, 4000K, 5000K
Mounting	L-Bracket or Magnetic Bar
Available Optics	120°
Rating	Interior Only
CRI	90+ CRI
Power Cable	UL Standard 6 ft.
Lens	Diffused lens standard. Contact factory for options.
Dimming	Patented CleanDim® Technology ensures even dimming from 0-100%.
Max Run	Max 30 LED boards per power feed.
Environmental	Operating temperature: -40°F-140°F Ambient(-40°C-60°C)** Storage temperature: -40°F-140°F Ambient indoor fixtures operation limited to =<50% relative humidity

*Control on Master Units Only


** Military spec available under special request-lead times and cost may be impacted.





PRODUCT SPECIFICATIONS:

Task	COLOR OPTION	VOLTAGE	FINISH	OCCUPANCY / VACANCY SENSOR	MOUNTING	WIRING	OPTION
S Satellite	2700K	120V	W White	NS No Sensor	MB Magnetic Bars	EP Three Prong Plug	
M Master	3000K	277V		85° 85° x 75°	This option is not available with hardwiring (HW)	HW Hardwired	
(Masters have on/off dimming & optional occ/vac sensor)	3500K			120° 120° x 90°	LB L-Shaped Bracket		
	4000K						
	5000K						

DIMENSIONS:

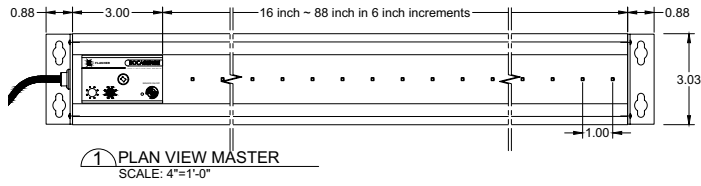


FIXTURE INFORMATION:

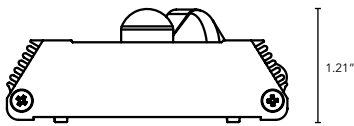

Magnetic plates attach to the back.
*Option not available with hardwire install.

LUMINAIRE INFORMATION:

LUMINOUS INTENSITY DISTRIBUTION CURVE

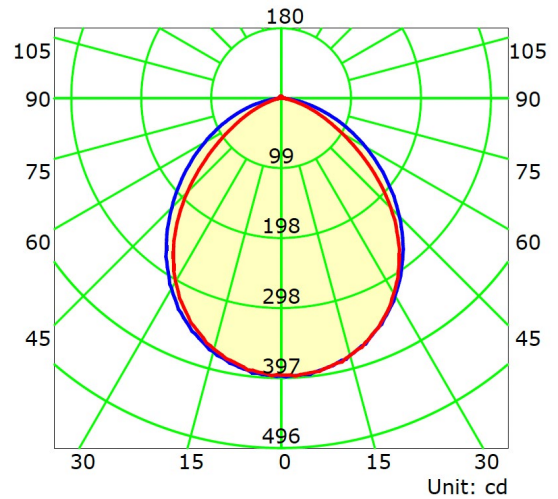

LUMEN DATA PER FOOT - 3000K

- INITIAL ON-10W-Total Rated Lamp Lumens: 913.5 lm
- MID-5W-Total Lamp Lumens: 398.6 lm
- LOW-3W-Total Lamp Lumens: 276.5 lm
- CLEAN BOOST-15W-Total Lamp Lumens: 1136.4 lm

- LLF:**
- 2700K-0.9
 - 3500K-1.2
 - 4000K-1.4
 - 5000K-1.6