

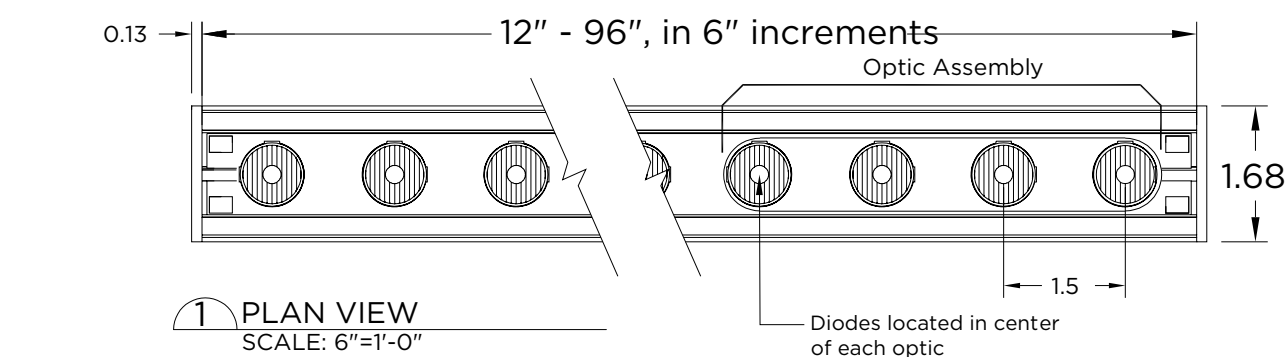


END CAP CONDITIONS

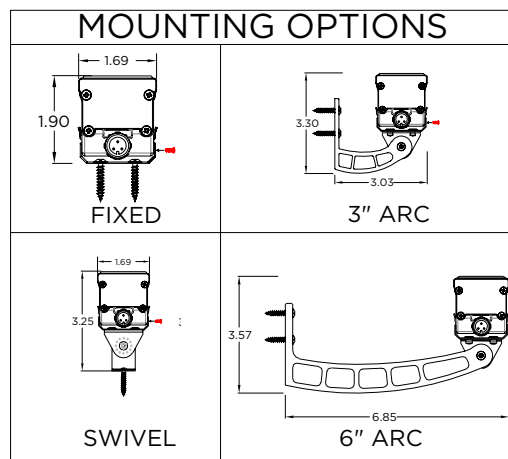

TECHNICAL DATA	
Parameter	Data
Wattage per Linear Ft.	7.3W @ 120V, 7.7W @ 277V
Input Voltage	90-120VAC, 230-277VAC
Input Current per Linear Ft.	62.4mA @ 120V, 30.0mA @ 277V
Control	Leading edge/ Trailing-edge line dimmer
Power Cable Length	UL Standard 18AWG, 6.5ft.
LED Spacing	1.5
Fixture Length	12"-96" in 6" increment
Fixture Width	1.68"
Total Height (Not Including Clip)	1.75"
Mounting	Adjustable Swivel Clip
Available Optics	10°, 30°, 60°, 10°x60°, 30°x60°, 120°
Finish Options	White or Black high temperature ABS Plastic
LED Color Options	2K, 24K, 27K, 3K, 35K, 4K, 5K, 65K
Color Rendering Index	90+ CRI
Ratings	Dry
Total linear ft per 20A breaker	256ft. @ 120V, 534ft. @ 277V
Total linear ft per 15A breaker	192ft. @ 120V, 400ft. @ 277V
Total linear ft per power feed	64ft. @ 120V, 133ft. @ 277V
Transformer	N/A

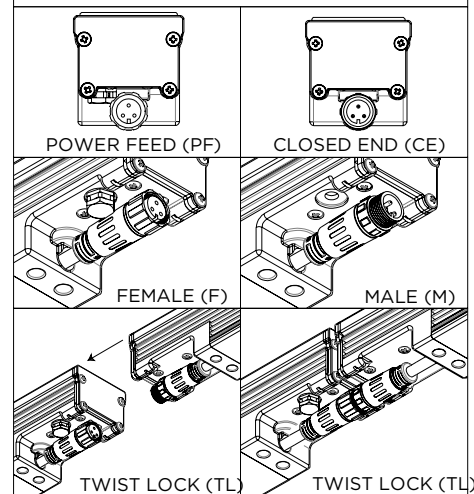

LED Lighting Systems, Technologies, & Manufacturing

508 South Military Trail
Deerfield Beach FL, 33442

www.boca.lighting.com
(561)989-5338

THIS DOCUMENT IS CONFIDENTIAL AND PROTECTED BY
COPYRIGHTS OF BOCA LIGHTING AND CONTROLS

PRODUCTS NAME:

HPNLS-LO-12IN-8W

FILE NAME: TECHNICAL SHEET

PART #: BF-HPNLS-LO

DRAWN BY: HYORIM LEE

DATE: 04032025

DESIGN BY: LUIS ROSADO

APPROVED BY: DAVE URBAN

SCALE: NTS

SHEET: 1 OF 1

REV: 04032025