



NANOTUNE

Tuneable White Light Line Voltage
Small Profile Linear LED Fixture



Customer: _____ Date: _____

Project: _____

Wattage	6W per linear ft.
Input Voltage	90-120V
Control	2-Channel DMX (NanoRouter), 2-Channel 0-10V
Power Cable	UL Standard 10 ft.
Length	12-72", in 6" increment
Total Width	1.03"
Total Height	0.82" (not including clip)
Color Options	2000K, 2400K, 2700K, 3000K, 3500K, 4000K, 5000K
Mounting	Fixed, Hinge
Available Optics	15°x40°, 120°
Rating	IP50
Material	High Temperature ABS Plastic
Custom	Contact Factory
Dimming	Patented CleanDim® Technology ensures even dimming from 0-100%.
CRI	90+ CRI
Finish	White or Black
Max Run	76ft. @ 120V, 156ft. @ 227V
Environmental	Operating temperature: -40°F-140°F Ambient(-40°C-60°C)** Storage temperature: -40°F-140°F Ambient indoor fixtures operation limited to =<50% relative humidity

** Military spec available under special request-lead times may be impacted.



PRODUCT SPECIFICATIONS:

	WATTAGE	COLOR OPTIONS			OPTIC	VOLTAGE	FINISH	MOUNTING	LENS	BAFFLE <small>(Not Available with 10° Optics)</small>			
	LOW	MEDIUM	HIGH										
Nanotune	6W	2000K	2400K	2700K	3000K	3500K	4000K	5000K	15°x40° 120°	W White B Black	F Fixed H Hinge	C Clear CLD Clear Light Diffused (Not Available with Optics) HD Heavy Diffused (Not Available with Optics)	SQ Square ASYM Asymmetric


ACCESSORY

KNIFE EDGE COVE

T Track Mount **Y** YES
(Only available with Fixed Mounting) **N** NO


DIMENSIONS:

Note: Allow 1/4" for each end cap and 1.25" for power feed cable

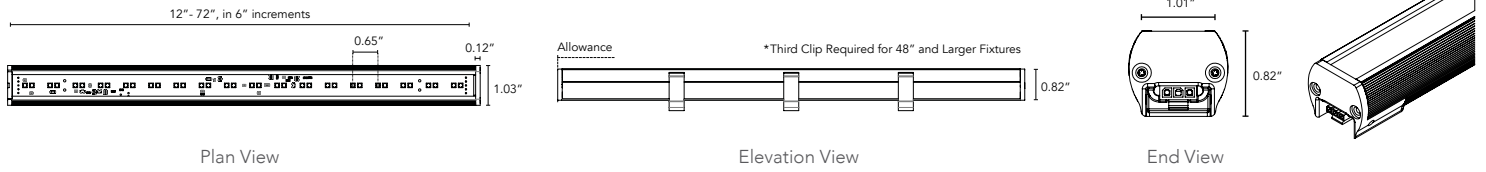


MOUNTING INFORMATION:

For vertical installation and installations above 4' please contact the factory for specific mounting instructions.

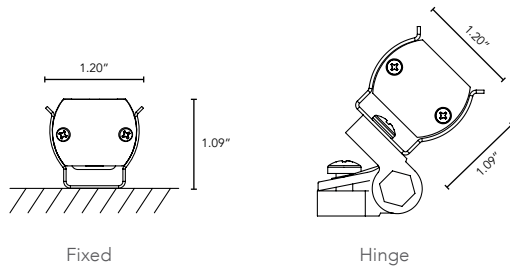

KNIFE EDGE COVE:

See Knife Edge Cove specification sheet for additional information.

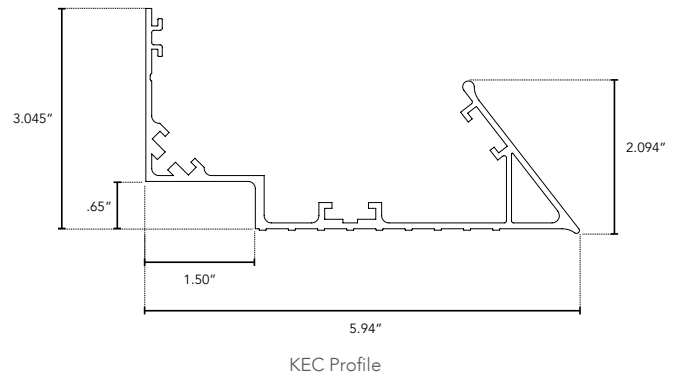

ACCESSORY:

Track Mount Clip System is only available with Fixed Mounting.

