NANOWEDGE

Micro Profile LED Closet & Corner Light

Customer: Date: Type:

Project:



Wattage	4W or 8W per linear ft.
Input Voltage	120V
Control	Forward/Reverse Phase Line Dimmer 0-10V*, Occupancy Sensor**, Infra Red Sensor**
LED Spacing	5/8" on Center
Length	See chart on page 2.
Total Height	1.34"
Total Width	1.26"
Color Options	1800K, 2000K, 2400K, 2700K, 3000K, 3500K, 4000K, 5000K, 6500K
Mounting	Fixed
Available Optics	120°
Rating	IP50 Interior Only
CRI	90+ CRI
Power Cable	UL Standard 10 ft.
Finish	Clear Anodized Aluminum
Material	Anodized Aluminum
Custom	Contacy Factory
Environmental	Operating temperature: -40°F-140°F Ambient(-40°C-60°C)*** Storage temperature: -40°F-140°F Ambient indoor fixtures operation limited to =<50% relative humidity

Key Features

- Compact linear fixture designed for closet and corner lighting.
- Available in 4W or 8W per linear foot with 90+ CRI.
- Optional occupancy and infrared sensors provide automatic on/off c

*Requires Boca SDS Dimming Interface
**Sensor Use Allows On/Off Only
***Military spec available under special request-lead times may be impacted.

PRODUCT SPECIFICATIONS:

PRODUCT		WATTAGE	COLOR OPTION	VOLTAGE	OPTIC	FINISH	MOUNTING	LENS	SENSOR
NANO WEDGE	CL			**120V**	**120°x120°**	**A**			
		4W **8W**	**1800K** **2000K** **2200K** **2400K** **2700K** **3000K** **3500K** **4000K** **5000K**	**120V**	**120°x120°**	**A** Clear Anodized Aluminum	**F** Fixed	**C** Clear **D** Diffused **OW** Opal White	**O** Occupancy **IR** Infra Red **NS** No Sensor


Boca Lighting and Controls · www.Boca.Lighting · Phone: 561-989-5338 · Fax: 561-982-8323

We are constantly improving our fixtures and reserve the right to change options and specifications. For specific requirements, contact your Boca Lighting and Controls sales representative. This product complies with IES LM-79-08 testing procedures and relevant standards. All products proudly manufactured in the USA. All rights reserved. All names and trademarks are property of their respective owners. © 2024 Boca Lighting and Controls

NANOWEDGE

Micro Profile LED Closet & Corner Light


DIMENSIONS:

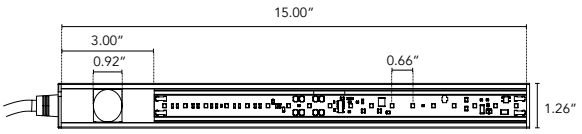

Plan View



Elevation View



End Cap

NANOWEDGE WITH SENSOR


PART NUMBER	OVERALL LENGTH
BF- Nanowedge-S-18	15.330
BF- Nanowedge-S-24	21.330
BF- Nanowedge-S-30	27.330
BF- Nanowedge-S-36	33.330
BF- Nanowedge-S-42	39.330
BF- Nanowedge-S-48	45.330
BF- Nanowedge-S-54	51.330
BF- Nanowedge-S-60	57.330
BF- Nanowedge-S-66	63.330
BF- Nanowedge-S-72	69.330
BF- Nanowedge-S-78	75.330
BF- Nanowedge-S-84	81.330
BF- Nanowedge-S-90	87.330
BF- Nanowedge-S-96	93.330

NANOWEDGE WITH NO SENSOR

PART NUMBER	OVERALL LENGTH
BF- Nanowedge-NS-15	12.330
BF- Nanowedge-NS-21	18.330
BF- Nanowedge-NS-27	24.330
BF- Nanowedge-NS-33	30.330
BF- Nanowedge-NS-39	36.330
BF- Nanowedge-NS-45	42.330
BF- Nanowedge-NS-51	48.330
BF- Nanowedge-NS-57	54.330
BF- Nanowedge-NS-63	60.330
BF- Nanowedge-NS-69	66.330
BF- Nanowedge-NS-75	72.330
BF- Nanowedge-NS-81	78.330
BF- Nanowedge-NS-87	84.330
BF- Nanowedge-NS-93	90.330

MOUNTING INFORMATION:

For vertical installation and installations above 4′ please contact the factory for specific mounting instructions.

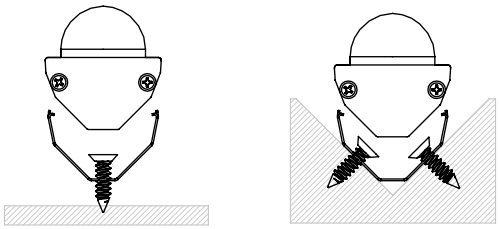

Boca Lighting and Controls · www.Boca.Lighting · Phone: 561-989-5338 · Fax: 561-982-8323

We are constantly improving our fixtures and reserve the right to change options and specifications. For specific requirements, contact your Boca Lighting and Controls sales representative. This product complies with IES LM-79-08 testing procedures and relevant standards. All products proudly manufactured in the USA. All rights reserved. All names and trademarks are property of their respective owners. © 2024 Boca Lighting and Controls

REV07082026