



1 PLAN VIEW
SCALE: 6"=1'-0"



2 ELEVATION VIEW
SCALE: 6"=1'-0"




3 END CAP
SCALE: 6"=1'-0"

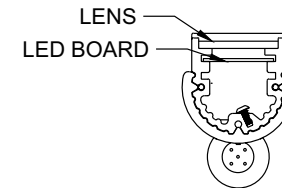


4 SECTION
SCALE: 6"=1'-0"

TECHNICAL DATA	
Parameter	Data
Wattage per Linear Ft.	8.4W @ 120V, 8.1W @ 277V
Input Voltage	90-120VAC, 230-277VAC
Input Current per Linear Ft.	75.3mA @ 120V, 32.2mA @ 277V
Control	Leading edge/ Trailing-edge line dimmer
Power Cable Length	UL Standard 18AWG, 6.5ft.
LED Spacing	0.65"
Fixture Length	12", 18", 24", 48"
Fixture Width	1.04"
Total Height (Not Including Clip)	0.89"
Mounting	Adjustable Swivel Clip
Available Optics	120°
Finish Options	White or Black high temperature ABS Plastic
LED Color Options	2K, 24K, 27K, 3K, 35K, 4K, 5K, 65K
Color Rendering Index	90+ CRI
Ratings	Dry
Total linear ft per 20A breaker	212ft. @ 120V, 497ft. @ 277V
Total linear ft per 15A breaker	159ft. @ 120V, 373ft. @ 277V
Total linear ft per power feed	53ft. @ 120V, 124ft. @ 277V
Transformer	N/A

ENDCAP CONDITIONS




FEMALE (F)



MALE (M)

MOUNTING OPTIONS

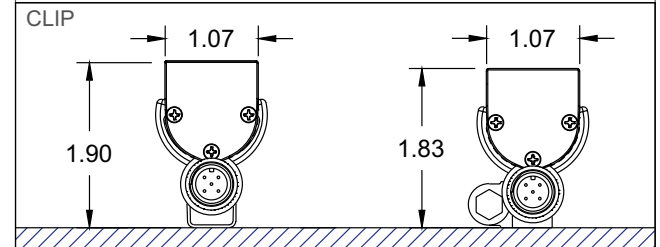

LED Lighting Systems, Technologies, & Manufacturing

508 South Military Trail
Deerfield Beach FL, 33442

www.boca.lighting
(561)989-5338

THIS DOCUMENT IS CONFIDENTIAL AND PROTECTED BY
COPYRIGHTS OF BOCA LIGHTING AND CONTROLS

PRODUCTS NAME:

NANOMIX PFC EXTERIOR

FILE NAME: TECHNICAL SHEET

PART #: BF-NANOLUME

DRAWN BY: HYORIM LEE

DATE: 04032025

DESIGN BY: LUIS ROSADO

APPROVED BY: DAVE URBAN

SCALE: NTS

SHEET: 1 OF 1

REV: 04032025