



1 PLAN VIEW



2 ELEVATION VIEW

MOUNTING OPTIONS

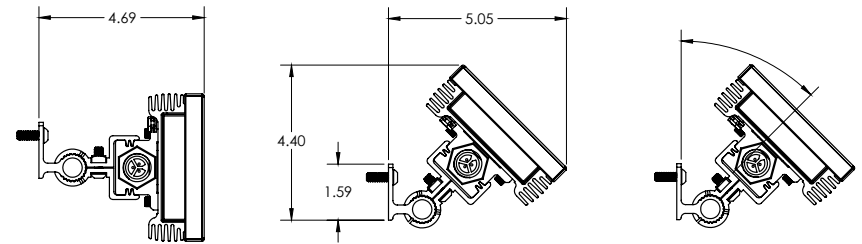

TECHNICAL DATA	
Parameter	Data
Power	42 Watts per linear ft.
Input Voltage	120Vac or 277Vac
Input Current per Linear Ft	288mA@120Vac 142mA@277Vac
Control	DMX512, Wireless DMX
Power Cable Length	UL Standard 10ft
LED Spacing	1" on center
Fixture Length	1ft, 2ft or 4ft
Fixture Width	4.19"
Total Height (not including clips)	2.51"
Mounting	Fixed, Swivel or Large Swivel
Available Optics	10°, 30°, 60°, 10°x 60°, 30°x 60°, 120°
Finish Options	Clear Anodized Aluminum
LED Color Options	RGB or White Mixing
Color Rendering Index	95 CRI (WM)
Ratings	Dry, IP65, IP68
Total Linear ft per 20A breaker	60ft@120Vac 120ft@277Vac
Total Linear ft per 15A breaker	45ft@120Vac 90ft@277Vac
Total Linear ft per Power Feed Transformer	Power Feed Wire Gauge Dependent N/A



LED Lighting Systems, Technologies, & Manufacturing

508 South Military Trail
Deerfield Beach FL, 33442

www.BocaFlasher.com
(561) 989-5338

THIS DOCUMENT IS CONFIDENTIAL AND PROTECTED
BY COPYRIGHTS OF BOCA FLASHER INC.

PRODUCT NAME:

HPFB

FILE NAME: TECHNICAL SHEET

PART #: HPFB

DRAWN BY: HYERI KANG

DATE: 03272020

DESIGN BY: LUIS ROSADO

APPROVED BY: M. PINDER

SCALE:

SHEET: 1 OF 1

REV: B