



NANO X-TW

Tuneable White Linear LED Fixture
Suited for Exterior or Damp Locations



Customer: _____ Date: _____ Type: _____
Project: _____

Wattage	6W per linear ft.
Input Voltage	90-120V
Control	Forward/Reverse Phase Line Dimmer 0-10V, DALI, DMX*
Power Cable	UL Standard 10 ft.
Length	1 ft., 1.5 ft., 2ft., 4ft.
Total Width	1.21" Fixed Clip
Total Height	2.08"
Color Options	1800K*, 2000K, 2200K,2400K, 2700K, 3000K, 3500K, 4000K, 5000K
Mounting	Fixed, Hinge
Available Optics	15°x40°, 120°
Rating	IP50, IP67
Material	Clear Anodized Aluminum
Custom	Contact Factory
Dimming	Patented CleanDim® Technology ensures even dimming from 0-100%.
CRI	90+ CRI
Finish	Clear Anodized
Max Run	76ft. @ 120V, 156ft. @ 227V
Environmental	Operating temperature: -40°F-140°F Ambient(-40°C-60°C)** Storage temperature: -40°F-140°F Ambient indoor fixtures operation limited to =<50% relative humidity

*Uses Boca SDS Module for 0-10V, Dali, or DMX Dimming.
**1800K Pending
*** Military spec available under special request-lead times may be impacted.


PRODUCT SPECIFICATIONS:

COLOR OPTION

PRODUCT	WATTAGE	LOW	MEDIUM	HIGH	VOLTAGE	OPTIC	FINISH	MOUNTING	LENS	BAFFLE	CONTROL
NANOTUNE											
	6W	2000K 2200K 2400K 2700K 3000K 3500K 4000K 5000K 6500K	2000K 2200K 2400K 2700K 3000K 3500K 4000K 5000K 6500K	2000K 2200K 2400K 2700K 3000K 3500K 4000K 5000K 6500K	90V-120V	15°x40° 120°x120°	A Clear Anodized Aluminum N Natatorium Finish* C Custom*	F Fixed H Hinge	C Clear CLD* Clear Light Diffused HD* Heavy Diffused	SB Square Baffle ASYM Asymmetric Baffle N No Baffe	0-10V DMX DALI
							*Additional charges may apply		*Not Available with 10°x10° OR 15°x45° Optics		

DIMENSIONS:

Note: Allow for 1/4" for each end cap and 1.25" for power feed cable.

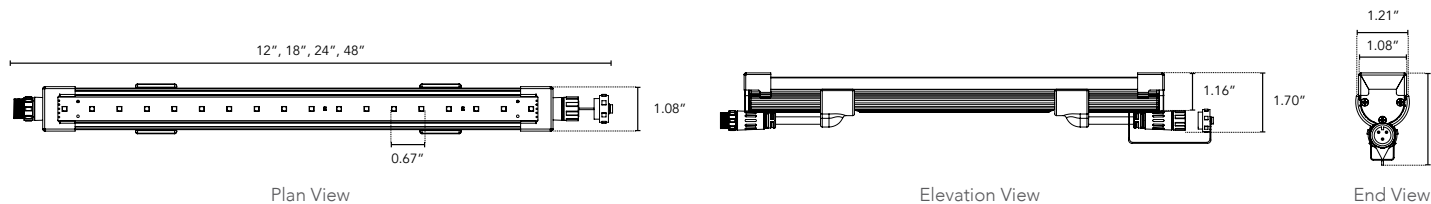

MOUNTING INFORMATION:

For vertical installation and installations above 4' please contact the factory for specific mounting instructions.

