



NICHE-HV

Micro Profile LED Fixture Line Light



Customer: _____ Date: _____ Type: _____

Project: _____

Wattage	4W or 8W per linear ft.
Input Voltage	120V
Control	Forward/Reverse Phase Line Dimmer 0-10V, DALI, or DMX*
LED Spacing	5/8" on Center
Length	12"-72" in 6" increments
Total Height	0.57"
Total Width	0.98"
Color Options	2400K, 2700K, 3000K, 3500K, 4000K, 5000K
Mounting	Fixed
Available Optics	120°x120°
Rating	IP50, Interior Only
CRI	90+ CRI
Power Cable	UL Standard 10 ft.
Finish	Black, White, Grey
Material	Anodized Aluminum
Custom	Contact Factory
Dimming	Patented CleanDim® Technology ensures even dimming from 0-100%.
Enironmental	Operating temperature: -40°F-140°F Ambient(-40°C-60°C)** Storage temperature: -40°F-140°F Ambient indoor fixtures operation limited to =<50% relative humidity


*Uses Boca SDS Module for 0-10V, Dali, or DMX Dimming.
**Military spec available under special request-lead times may be impacted.

PRODUCT SPECIFICATIONS:

PRODUCT	WATTAGE	COLOR OPTION	VOLTAGE	OPTIC	FINISH	MOUNTING	LENS
NICHE HV							
	4W 8W	2400K 2700K 3000K 3500K 4000K 5000K	120V	120°x120°	A Clear Anodized Aluminum	F Fixed	C Clear CLD Clear Light Diffused HD Heavy Diffused

DIMENSIONS:

Note: Allow 1/4" for each end cap and 2" for power feed cable.

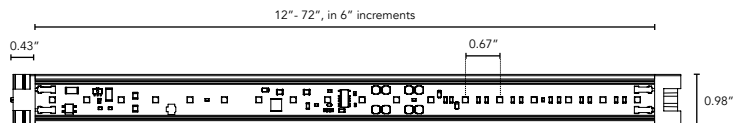


Plan View



Elevation View

MOUNTING INFORMATION:

For vertical installation and installations above 4' please contact the factory for specific mounting instructions.



Fixed