



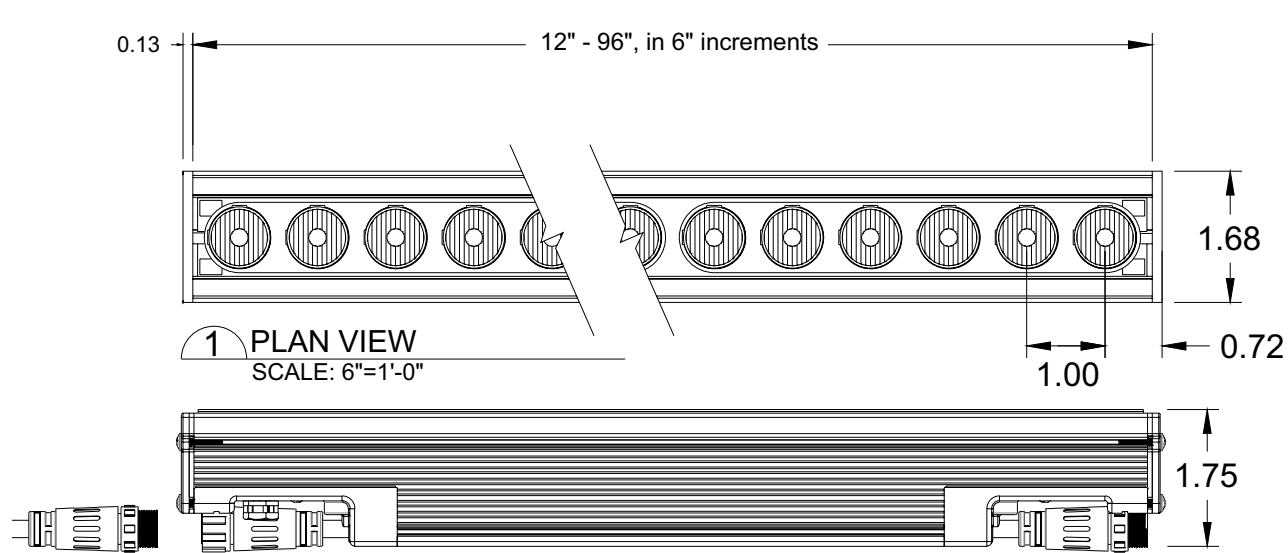


1 PLAN VIEW
SCALE: 6"=1'-0"

2 ELEVATION VIEW
SCALE: 6"=1'-0"



3 END CAP
SCALE: 6"=1'-0"

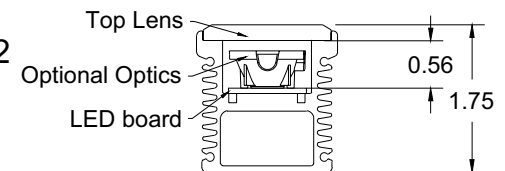


4 SECTION
SCALE: 6"=1'-0"


TECHNICAL DATA

Parameter	Data
Wattage per Linear Ft.	17.8W @120V, 18.3W @277V
Input Voltage	90-120VAC or 230-277VAC
Input Current per Linear Ft.	155.7mA @120V, 79.3mA @277V
Control	Leading edge/ Trailing-edge line dimmer
Power Cable Length	UL Standard 18AWG, 6.5ft.
LED Spacing	1"
Fixture Length	12"-96" in 6" increment
Fixture Width	1.68"
Total Height (Not Including Clip)	1.75"
Mounting	Adjustable Swivel Clip
Available Optics	10°, 30°, 60°, 10x30°, 10°x60°, 30°x60°, 120°
Finish Options	White or Black high temperature ABS Plastic
LED Color Options	2K, 24K, 27K, 3K, 35K, 4K, 5K, 65K
Color Rendering Index	90+ CRI
Ratings	Dry
Total linear ft per 20A breaker	102ft. @ 120V, 201ft. @ 277V
Total linear ft per 15A breaker	77ft. @ 120V, 151ft. @ 277V
Total linear ft per power feed	25ft. @ 120V, 50ft. @ 277V
Transformer	N/A


MOUNTING OPTIONS




FIXED



3" ARC




SWIVEL




6" ARC


END CAP CONDITIONS




POWER FEED (PF)




CLOSED END (CE)




FEMALE (F)



MALE (M)



TWIST LOCK (TL)



TWIST LOCK (TL)



LIGHTING | CONTROLS

LED Lighting Systems, Technologies, & Manufacturing

508 South Military Trail
Deerfield Beach FL, 33442

www.boca.lighting
(561)989-5338

THIS DOCUMENT IS CONFIDENTIAL AND PROTECTED BY
COPYRIGHTS OF BOCA LIGHTING AND CONTROLS

PRODUCTS NAME:
HPNLS-MIX

FILE NAME: TECHNICAL SHEET

PART #: BF-HPNLS-LO

DRAWN BY: HYORIM LEE

DATE: 04032025

DESIGN BY: LUIS ROSADO

APPROVED BY: DAVE URBAN

SCALE: NTS

SHEET: 1 OF 1

REV: 04032025