


SBL-MC

High Intensity Solid Color LED Fixture

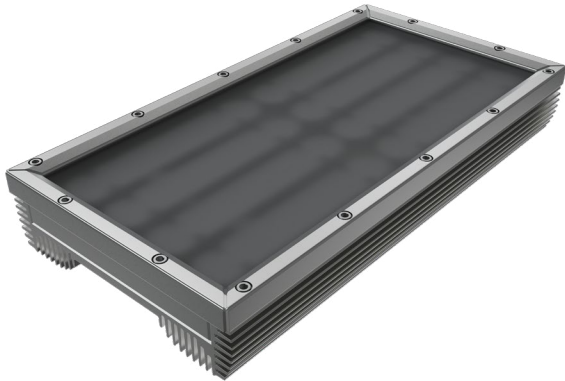

Customer: _____ Date: _____ Type: _____

Project: _____

Wattage	48W per linear ft.
Input Voltage	120V, 277V
Control	Leading Edge/Trailing Edge Line Dimmer 0-10V, DALI or DMX**
LED Spacing	1"x1.5" on Center
Length	1ft., 2 ft., 4 ft.
Total Height	2.62"
Total Width	6.74"
Color Options	2700K, 3000K, 3500K, 4000K, 5000K, Amber, Red, Green, Blue
Mounting	Fixed, Swivel
Available Optics	10°x10°, 30°x30°, 60°x60°, 10°x30°, 10°x60°, 30°x60°, 120°x120°
Rating	IP50, IP67, IP69K
CRI	90+ CRI
Power Cable	UL Standard 10 ft.
Finish	Black, White, Grey
Material	Anodized Aluminum
Custom	Contact Factory
Dimming	Patented CleanDim® Technology ensures even dimming from 0-100%.
Environmental	Operating temperature: -40°F-140°F Ambient(-40°C-60°C)*** Storage temperature: -40°F-140°F Ambient indoor fixtures operation limited to =<50% relative humidity

** Use Boca SDS module for 0-10V or DMX Dimming.

*** Military spec available under special request-lead times may be impacted.




* Contact factory for Extreme Environment Installations.

PRODUCT SPECIFICATIONS:

PRODUCT	COLOR OPTION	VOLTAGE	OPTIC	FINISH	MOUNTING	LOCATION	OPTIONS
SBL MC							
	2700K 3000K 3500K 4000K 5000K Amber Red Green Blue	120V 277V	10°x10° 30°x30° 60°x60° 10°x30° 10°x60° 30°x60° 120°x120°	A Clear Anodized Aluminum	F Fixed S Swivel	I Interior-IP50 E Exterior-IP67	

DIMENSIONS:

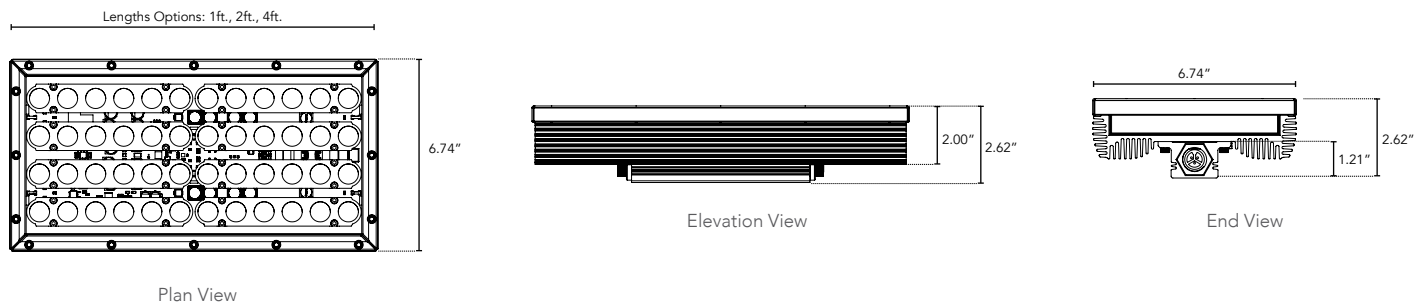

MOUNTING INFORMATION:

For vertical installation and installations above 4' please contact the factory for specific mounting instructions.

