NANOTUNE

Tuneable White Light Line Voltage
Small Profile Linear LED Fixture

Customer: Date: Type:

Project:



Wattage	6W per linear ft.
Input Voltage	90-120V
Control	2-Channel DMX (NanoRouter), 2-Channel 0-10V
Power Cable	UL Standard 10 ft.
Length	12-72", in 6" increment
Total Width	1.03"
Total Height	0.82" (not including clip)
Color Options	1800K, 2000K, 2200K, 2400K, 2700K, 3000K, 3500K, 4000K, 5000K, 6500K
Mounting	Fixed, Hinge
Available Optics	15°×40°, 45°, 60°, 120°x 120°, ASYM, WW
Rating	IP50
Material	High Temperature ABS Plastic
Custom	Contact Factory
Dimming	Patented CleanDim® Technology ensures even dimming from 0-100%.
CRI	90+ CRI
Finish	White or Black
Max Run	76ft. @ 120V, 156ft. @ 227V
Environmental	Operating temperature: -40°F-140°F Ambient(-40°C-60°C)** Storage temperature: -40°F-140°F Ambient indoor fixtures operation limited to =<50% relative humidity

** Military spec available under special request-lead times may be impacted.

Key Features

- Micro-profile exterior fixture available in 3W, 6W or 10W per linear foot.
- IP50 and IP67 configurations with CleanDim® 0–100% dimming.
- Expanded optics include 45°, 60°, Asymmetric and Wall Wash

PRODUCT SPECIFICATIONS:

			COLOR OPTION										
PRODUCT	WATTAGE	LOW	MEDIUM	HIGH	VOLTAGE	OPTIC	FINISH	MOUNTING	LENS	BAFFLE	CONTROL	KNIFE EDGE COVE	ACCESSORY
NANOTUNE	**6W**				**90V-120V**								
		1800K **2000K** **2200K** **2400K** **2700K** **3000K** **3500K** **4000K** **5000K** **6500K**	**1800K** **2000K** **2200K** **2400K** **2700K** **3000K** **3500K** **4000K** **5000K** **6500K**	**1800K** **2000K** **2200K** **2400K** **2700K** **3000K** **3500K** **4000K** **5000K** **6500K**		**15°x40°** **45°** **60°** **120°x120°** **ASYM** Asymmetric **WW** Wall Wash	**W** White **B** Black	**F** Fixed **H** Hinge	**C** Clear **CLD*** Clear Light Diffused **HD*** Heavy Diffused *Not Available with 10°x10° OR 15°X45° Optics	**SB** Square Baffle **ASYM** Asymmetric Baffle **N** No Baffe	**DMX-2** Channel **0-10V-2** Channel	**Y** YES **N** NO	**T** Track Mount (Only available with Fixed Mounting) Note: Knife Ege Cove compatible.

Boca Lighting and Controls · www.Boca.Lighting · Phone: 561-989-5338 · Fax: 561-982-8323

We are constantly improving our fixtures and reserve the right to change options and specifications. For specific requirements, contact your Boca Lighting and Controls sales representative. This product complies with IES LM-79-08 testing procedures and relevant standards. All products proudly manufactured in the USA. All rights reserved. All names and trademarks are property of their respective owners. © 2024 Boca Lighting and Controls


REV11032026

NANOTUNE


Tuneable White Light Line Voltage Small Profile Linear LED Fixture

DIMENSIONS:


Note: Allow 1/4" for each end cap and 1.25" for power feed cable



Plan View




Elevation View

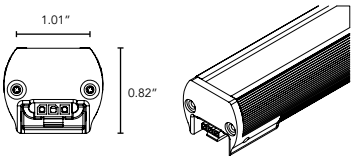


End View

MOUNTING INFORMATION:

For vertical installation and installations above 4' please contact the factory for specific mounting instructions.




Fixed



Hinge

KNIFE EDGE COVE:


See Knife Edge Cove specification sheet for additional information.

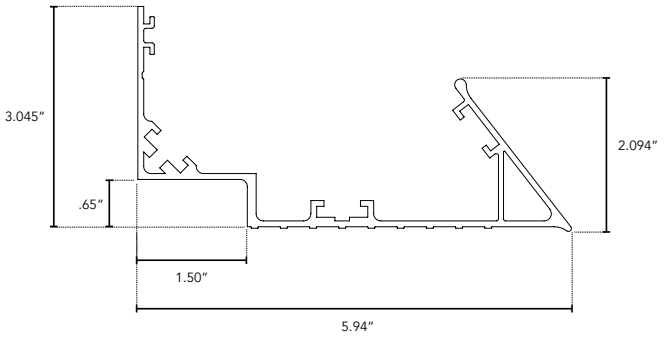


KEC Profile

ACCESSORY:

Track Mount Clip System is only available with Fixed Mounting.

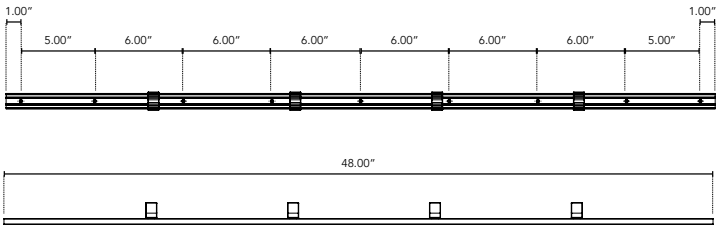

Plan View



Elevation View

Boca Lighting and Controls · www.Boca.Lighting · Phone: 561-989-5338 · Fax: 561-982-8323

We are constantly improving our fixtures and reserve the right to change options and specifications. For specific requirements, contact your Boca Lighting and Controls sales representative. This product complies with IES LM-79-08 testing procedures and relevant standards. All products proudly manufactured in the USA. All rights reserved. All names and trademarks are property of their respective owners. © 2024 Boca Lighting and Controls

REV11032026