




HPNLS-TW

Small Profile Tuneable White
Linear LED Fixture

Customer: _____ Date: _____ Type: _____

Project: _____



Wattage	14W per linear ft*
Input Voltage	90-120V, 230-277V
Control	Standard DMX 512
LED Spacing	1.0" on Center
Length	12"-96", in 12" increments
Total Height	1.68"
Total Width	1.80" (not including clip)
Color Options	2000K, 2200K, 2400K, 2700K, 3000K, 3500K, 4000K, 5000K
Mounting	Fixed, Swivel, Hinge, Vandal, 6", 12", 18" Extended Arm
Available Optics	10°x10°, 30°x30°, 60°x 60°, 10°x30°, 10°x60°, 30°x60°, 100°x100°
Rating	IP50, IP67, IP69K
CRI	90+ CRI
Power Cable	UL Standard 10 ft
Environmental	Operating temperature: -40°F-140°F Ambient(-40°C-60°C)** Storage temperature: -40°F-140°F Ambient indoor fixtures operation limited to =<50% relative humidity

** Military spec available under special request-lead times may be impacted.





PRODUCT SPECIFICATIONS:

PRODUCT	LOW	MEDIUM	HIGH	VOLTAGE	OPTIC	FINISH	LOCATION	MOUNTING	LENS	OPTIONS
HPNLS-TW										
	2000K 2200K 2400K 2700K 3000K 3500K 4000K 5000K 6500K	2000K 2200K 2400K 2700K 3000K 3500K 4000K 5000K 6500K	2000K 2200K 2400K 2700K 3000K 3500K 4000K 5000K 6500K	120V 277V	10°x10° 30°x30° 60°x60° 10°x30° 10°x60° 30°x60° 100°x100°	W White B Black G Gray	I Interior-IP50 E Exterior-IP67 N Natatorium* K IP69K-Extreme Environment	F Fixed S Swivel H Hinge V Vandal Proof Clip 6" Extended Arm 12" Extended Arm 18" Extended Arm	C Clear D Diffused SI Satin Ice (Interior Use Only) OP Opal White	SB Square Baffle ASYM Asymmetric Baffle SKB Kicker Baffle HL Hexcell Louver*
							*Chromate Conversion with Marine Grade Powder Coat-IP67. Extra Charges may apply.			*Cannot be used with Satin Ice White or 120° optic





DIMENSIONS:

For vertical installation and installations above 4' please contact the factory for specific mounting instructions.

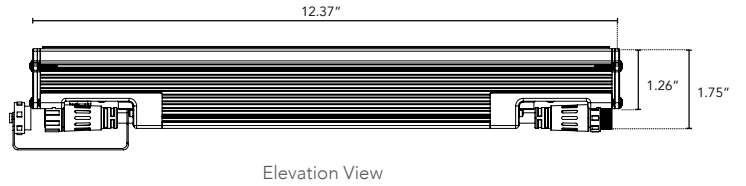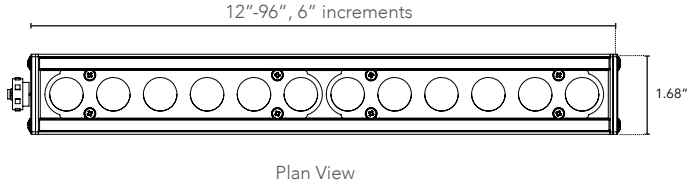


MOUNTING INFORMATION:

Note: Fixtures 1-2ft, Place clips 3" from edge as shown. Fixtures more than 2ft., Place clips 3.5" from edges as shown.

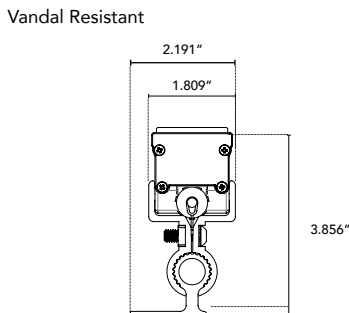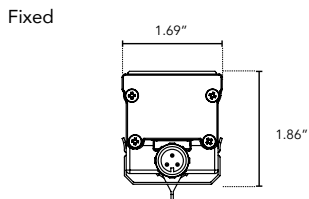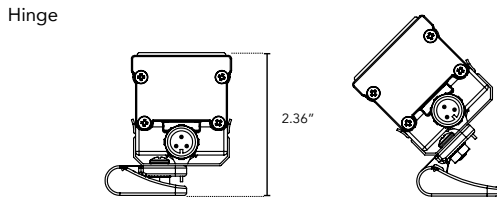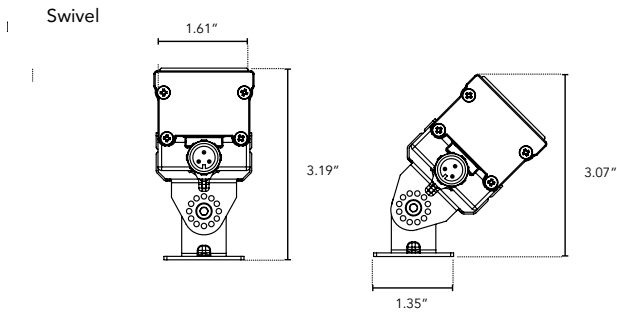


OPTICS

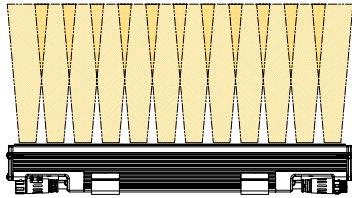

10°x10°




30°x30°

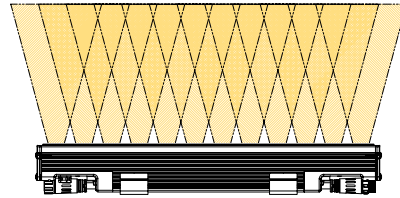

10°x60°



30°x60°

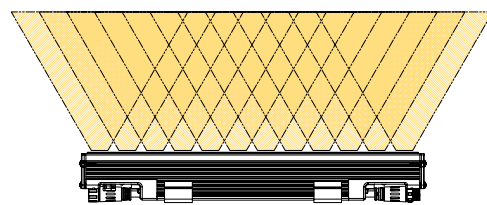

60°x60°

