




1 PLAN VIEW

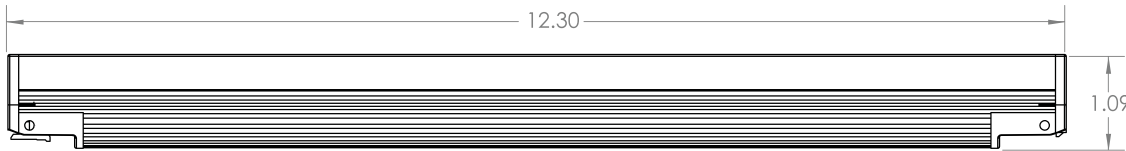


2 ELEVATION VIEW




3 END CAP

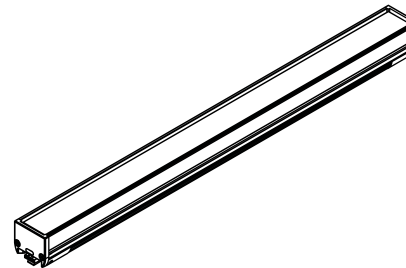

ENDCAP CONDITIONS




MALE (M)




FEMALE (F)

MOUNTING OPTIONS

CLIP10A & 17A

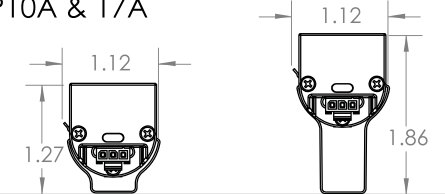

FXT154A

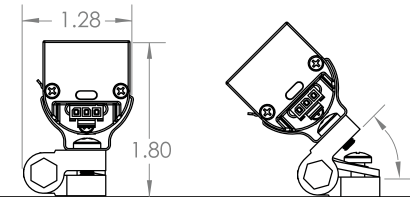

TECHNICAL DATA		
Parameter	Data	
Power	10W	6W
Input Voltage	120V or 277V	120V or 277V
Input Current per Linear Ft	87mA @120V 40mA @ 277V	53mA @120V 26mA @ 277V
Control	Line Voltage Dimmer	Line Voltage Dimmer
Power Cable Length	UL Standard 6.5ft	UL Standard 6.5ft
LED Spacing	0.67"	0.67"
Fixture Length	12"-72", in 4" increments	12"-72", in 4" increments
Fixture Width	1.01"	1.01"
Total Height (not including clips)	1.09"	1.09"
Mounting	Clip 10A, Clip17A, FXT154A	Clip 10A, Clip17A, FXT154A
Available Optics	15x40°, 120°	15x40°, 120°
Finish Options	Clear Anodized	Clear Anodized
LED Color Options	2000K, 2400K, 2700K,3000K, 3500K,4000K	2000K, 2400K, 2700K,3000K, 3500K,4000K
Color Rendering Index	95+	95+
Ratings	IP52	IP52
Total Linear ft per 20A breaker	180ft @ 120V, 420ft @ 277V	300ft @ 120V, 660ft @ 277V
Total Linear ft per 15A breaker	136ft @ 120V, 315ft @ 277V	220ft @ 120V, 490ft @ 277V
Total Linear ft per Power Feed	46ft @ 120V, 100ft @ 277V	75ft @ 120V, 166ft @ 277V
Transformer	N/A	N/A



LIGHTING | CONTROLS
LED Lighting Systems, Technologies, & Manufacturing

508 South Military Trail
Deerfield Beach FL, 33442

www.Boca.Lighting
(561) 989-5338

THIS DOCUMENT IS CONFIDENTIAL AND PROTECTED BY COPYRIGHTS OF BOCA FLASHER INC.

PRODUCT NAME:

NANOLUME HD

FILE NAME: TECHNICAL SHEET

PART #: NANOLUME HO_UC

DRAWN BY: H.KANG

DATE: 11152023

DESIGN BY: L.ROSADO

APPROVED BY: M. PINDER

SCALE: NTS

SHEET: 1 OF 1

REV: A