



NANOROD

Micro Profile LED Illuminated Closet Rod



Customer: _____ Date: _____

Project: _____

Wattage	4W or 8W per linear ft.
Input Voltage	120VAC
Control	Forward/Reverse Phase Line Dimmer, 0-10V*
LED Spacing	5/8" on Center
Length	12"-96" in 4" increments. Allow 1" for each end cap.
Total Width	1.20"
Total Height	1.20"
Color Options	2400K, 2700K, 3000K, 3500K, 4000K, 5000K
Mounting	Fixed, End
Available Optics	120°
CRI	90+ CRI
Rating	IP50, Closet Rated - Interior Only
Power Cable	UL Standard 10 ft.
Material	Anodized Aluminum
Finish	Clear Anodized Aluminum
Custom	Contact Factory
Environmental	Operating temperature: -40°F-140°F Ambient(-40°C-60°C)** Storage temperature: -40°F-140°F Ambient indoor fixtures operation limited to =<50% relative humidity




*Requires Boca SDS Dimming Interface

** Military spec available under special request-lead times may be impacted.

PRODUCT SPECIFICATIONS:

	WATTAGE	COLOR OPTION	OPTIC	VOLTAGE	FINISH	LENS	MOUNTING
NanoRod	CL		120°	120V	A		
	4W 8W	2400K 2700K 3000K 3500K 4000K 5000K			A Clear Anodized Aluminum *Contact factory for custom options	C Clear D Diffused OW Opal White	EC End Mount - Mounts Up to 36" EC1 End Mount With 1 Support - Mounts 36-72" EC2 End Mount With 2 Supports - Mounts 72"-96"

DIMENSIONS:

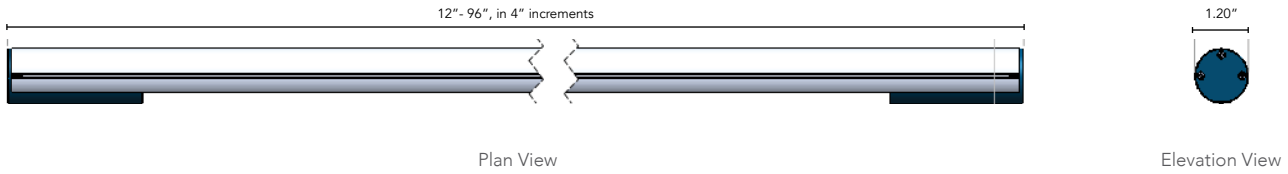

MOUNTING INFORMATION:

