


SBL-MIX

High Intensity Color or White LED Fixture

Customer:		Date:	Type:	
Project:				



Wattage	65W per linear ft				
Input Voltage	90-120 VAC , 230-277 VAC				
Control	Standard DMX 512, Wireless DMX*				
LED Spacing	1.0" on Center				
Length	1 ft, 2 ft or 4 ft				
Total Height	2.62"				
Total Width	6.74"				
Color Options	RGB, White Mixing				
Mounting	Fixed or Swivel				
Available Optics	10°x10°, 30°x30°, 60°x60°, 10°x30°, 10°x60°, 30°x60°, 120°x120°				
Rating	IP50, IP67, IP69K*				
DMX	Wireless				
Power Cable	UL Standard 10 ft				
White Mixing Options	2700K, 3000K, 3500K, 5000K, Amber				
Environmental	Operating temperature: -40°F-140°F Ambient (-40°C-60°C)** Storage temperature: -40°F-140°F Ambient indoor fixtures operation limited to = $<50\%$ relative humidity				

*Use Boca Nanorouter/Monorouter Wireless DMX Control.

**Military spec available under special request-lead times may be impacted.










^{*}Contact factory for Extreme Environment Installations.

PRODUCT SPECIFICATIONS:

PRODUCT	COLOR OPTION	VOLTAGE	OPTIC	FINISH	MOUNTING	LOCATION	WHITE MIXING OPTIONS	HEXCELL
SBL MIX								
	RGB - 3 Channel RGBW - 4 Channel* RGB/WM - 6 Channel* RGBW/WM - 8 Channel* WM White Mix - 3 Channel	120V 277V	10°x10° 30°x30° 60°x60° 10°x30° 10°x60° 30°x60° 120°x120°	A Clear Anodized Aluminum	F Fixed S Swivel H Hinge 3Arc 3" Arc Swivel 6Arc 6" Arc Swivel V Vandal Proof Clip	I Interior-IP50 E Exterior-IP67	2700K 3000K 3500K 4000K 5000K Amber	Y Yes N No
	*White or Mixing - Select Options						If specifying WM or RGBW indicate white options here: (Up to 3 different options can be specified)	



DIMENSIONS:

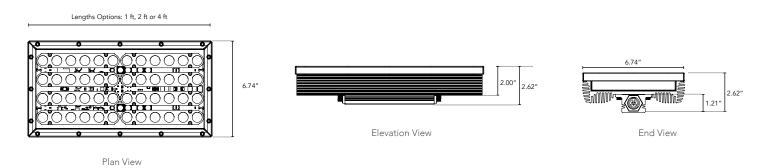

MOUNTING INFORMATION:

For vertical installation and installations above 4' please contact the factory for specific mounting instructions.

