HPNLS-MIX Small Profile Color Changing LED Fixture

Customer: -Project:



Wattage	14W per linear ft*					
Input Voltage	90-120V, 230-277V					
Control	Standard DMX 512					
LED Spacing	1.0" on Center					
Length	12", 18", 24", 36", 48", 96"					
Total Height	1.68"					
Total Width	1.80" (not including clip)					
Color Options	Alternating RGB, RGBW, Triple Diode RGB, White Mixing					
Mounting	Fixed, Hinge, Vandal, Arc 3 or Arc 6					
Available Optics	10°, 30°, 60°, 10° × 60°, 30° × 60°, 120°					
Rating	IP50, IP67, IP69K					
CRI	90+ for White Mix Only					
Power Cable	UL Standard 10 ft					
Environmental	Operating temperature: -40°F-140°F Ambient(-40°C-60°C)** Storage temperature: -40°F-140°F Ambient indoor fixtures operation limited to =<50% relative humidity					

*Custom wattage available upon request. Title 24 compliant fixture not to exceed 18 watts / 4ft fixture.

** Military spec available under special request-lead times may be impacted.

PRODUCT SPECIFICATIONS:

IP67

IP50

IP69K

BABA

	COLOR OPTION	OPTIC	VOLTAGE	FINISH	LOCATION	MOUNTING	LENS	WHITE MIXING OPTIONS
HPNLS-MIX								
	RGB RGBW TRGB Triple Diode (120° only) WM White Color Mixing *See White Mix Options	10° 30° 60° 10°x 60° 30°x 60° 120°	120V 277V	W White B Black G Gray	I Interior-IP50 E Exterior-IP67 K IP69K-Extreme Enviroment	F Fixed H Hinge 3Arc 3" Arc Swivel 6Arc 6" Arc Swivel V Vandal Resistant		If specifying WM indicate white options here: (Up to 3 different options can be specified) 2700K 3000K 4000K 5000K Amber
	OPTIONS							

SB Square Baffle **ASYM** Asymmetric Baffle **SKB** Kicker Baffle **HL** Hexcell Louver (Cannot be used with Satin Ice White or 120° optic)

Boca Lighting and Controls · www.Boca.Lighting · Phone: 561-989-5338 · Fax: 561-982-8323


We are constantly improving our fixtures and reserve the right to change options and specifications. For specific requirements, contact your Boca Lighting and Controls sales representative. This product complies with IES LM-79-08 testing procedures and relevant standards. All products proudly manufactured in the USA. All rights reserved. All names and trademarks are property of their respective owners. © 2024 Boca Lighting and Controls



HPNLS-MIX

DIMENSIONS:

For vertical installation and installations above 4' please contact the factory for specific mounting instructions.

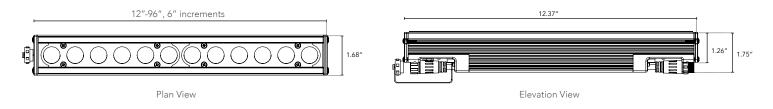

LIGHTSOURCE REPORT

WHITE W/CLEAR GLASS LENS

- CIE Colorimetric Parameters


- Photometric Parameters

- Luminous Flux: 634.40 lm Efficiency: 59.46 lm/W


- CCT: Tc = 3088K

MOUNTING INFORMATION:

Note: Fixtures 1-2ft, Place clips 3" from edge as shown. Fixtures more than 2ft., Place clips 3.5" from edges as shown.

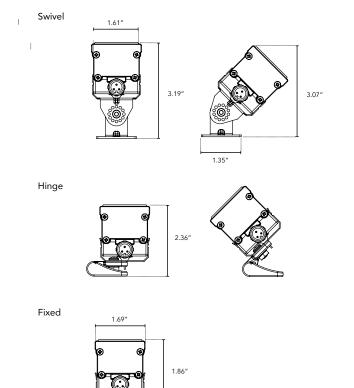

Vandal Resistant





We are constantly improving our fixtures and reserve the right to change options and specifications. For specific requirements, contact your Boca Lighting and Controls sales representative. This product complies with IES LM-79-08 testing procedures and relevant standards. All products proudly manufactured in the USA. All rights reserved. All names and trademarks are property of their respective owners. © 2024 Boca Lighting and Controls

WHITE W/CLEAR GLASS LENS

- RGBW w/Clear Glass Lens CCT: Tc = 4392K
- Photometric Parameters
- Luminous Flux: 922.16 lm
- Efficiency: 34.65 lm/W