
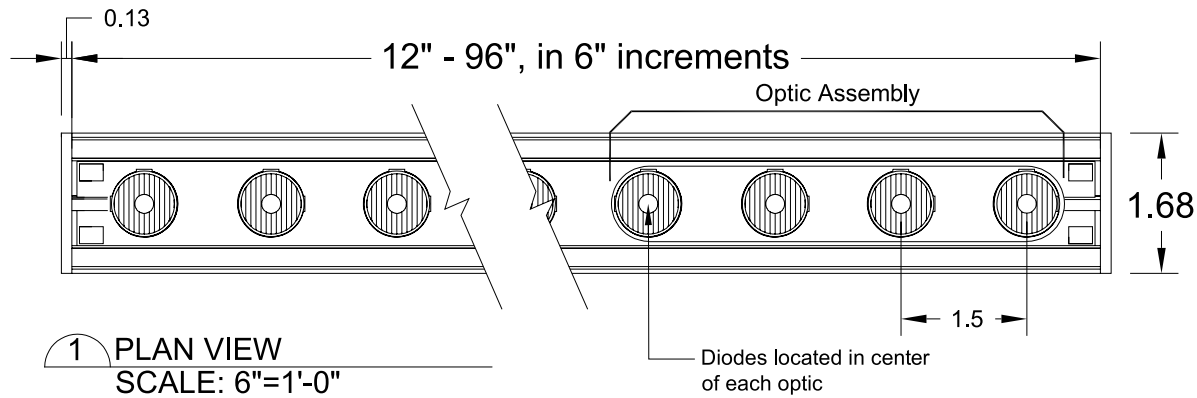



TECHNICAL DATA

Parameter	Data
Wattage per Linear Ft.	7.7W @ 24V
Input Voltage	24VAC
Input Current per Linear Ft.	336.1mA @ 24V
Control	Leading edge/ Trailing-edge line dimmer
Power Cable Length	UL Standard 18AWG, 6.5ft.
LED Spacing	1.5"
Fixture Length	12"-96" in 6" increment
Fixture Width	1.68"
Total Height (Not Including Clip)	1.75"
Mounting	Adjustable Swivel Clip
Available Optics	10°, 30°, 60°, 10°x60°, 30°x60°, 120°
Finish Options	White or Black high temperature ABS Plastic
LED Color Options	2K, 24K, 27K, 3K, 35K, 4K, 5K, 65K
Color Rendering Index	90+ CRI
Ratings	Dry
Total linear ft per 20A breaker	47ft. @ 24V
Total linear ft per 15A breaker	35ft. @ 24V
Total linear ft per power feed	11ft. @ 24V
Transformer	Primary: 120V-277V, Secondary: 24V

MOUNTING OPTIONS

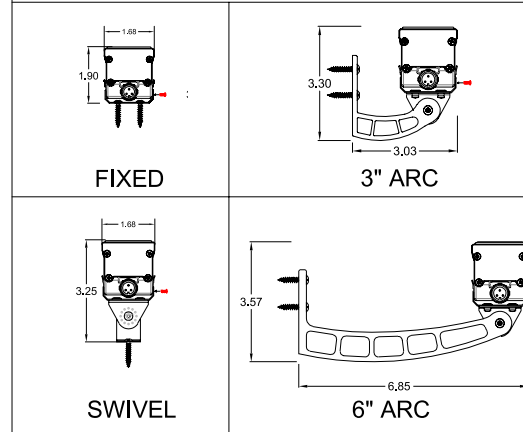

END CAP CONDITIONS

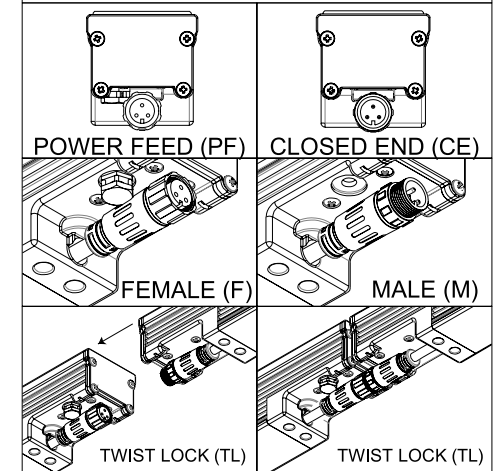

LIGHTING | CONTROLS

LED Lighting Systems, Technologies, & Manufacturing

508 South Military Trail
Deerfield Beach FL, 33442

www.boca.lighting
(561)989-5338

THIS DOCUMENT IS CONFIDENTIAL AND PROTECTED BY
COPYRIGHTS OF BOCA LIGHTING AND CONTROLS

PRODUCTS NAME:

BF-HPNLS-LO-RT-12IN-8W

FILE NAME: TECHNICAL SHEET

PART #: BF-HPNLS-LO

DRAWN BY: HYORIM LEE

DATE: 04032025

DESIGN BY: LUIS ROSADO

APPROVED BY: DAVE URBAN

SCALE: NTS

SHEET: 1 OF 1

REV: 04032025