



1 PLAN VIEW

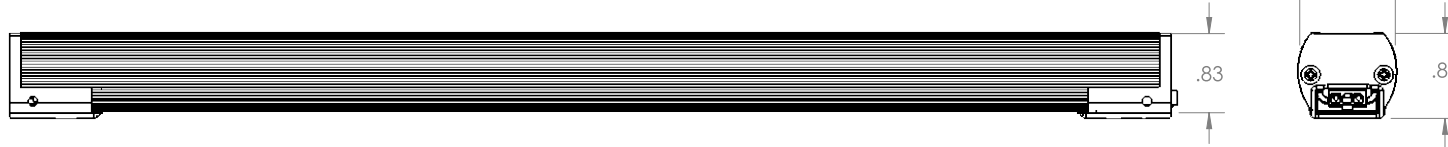


2 ELEVATION VIEW

END CAP CONDITIONS





MALE (M)




FEMALE (F)


MOUNTING OPTIONS

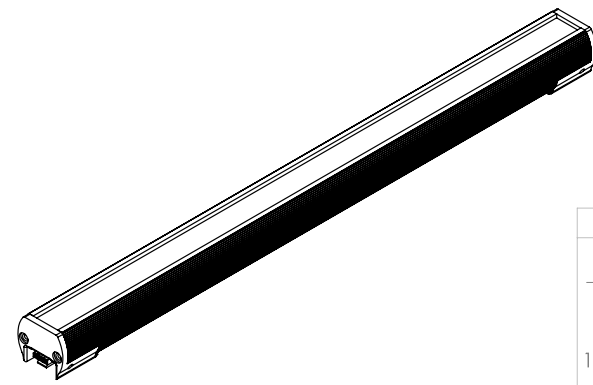

SIDE VIEW OF HINGE ASSEMBLY

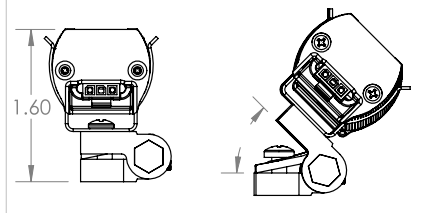

TECHNICAL DATA	
Parameter	Data
Power	6 watts per linear ft.
Input Voltage	90-120V or 230-277V
Input Current per Linear Ft	54mA@120V or 24mA@277V
Control	Leading-edge/Trailing-edge line dimmer
Power Cable Length	UL Standard 10ft
LED Spacing	5/8" on center
Fixture Length	12"-72", in 4" increment
Fixture Width	1.04"
Total Height (not including clips)	0.82"
Mounting	Adjustable Swivel Clip
Available Optics	120°
Finish Options	White or Black high temperature ABS Plastic
LED Color Options	2K, 24K, 27K, 3K, 35K, 4K, 5K, 65K
Color Rendering Index	90+ CRI
Ratings	Dry
Total Linear ft per 20A breaker	210ft@120V or 470ft@277V
Total Linear ft per 15A breaker	156ft@120V or 350ft@277V
Total Linear ft per Power Feed	76ft@120V or 156ft@277V
Transformer	N/A

 LIGHTING   CONTROLS LED Lighting Systems, Technologies, & Manufacturing		PRODUCT NAME: <b>NANOLUME 6W</b>	
		FILE NAME: TECHNICAL SHEET	PART #: BF-NANOLUME
DRAWN BY: HYERI KANG		DATE: 03272020	
DESIGN BY: LUIS ROSADO			
508 South Military Trail Deerfield Beach FL, 33442		www.BocaFlasher.com (561) 989-5338	
APPROVED BY: M. PINDER			
THIS DOCUMENT IS CONFIDENTIAL AND PROTECTED BY COPYRIGHTS OF BOCA FLASHER INC.		SCALE:	SHEET: 1 OF 1
		REV: B	