



NICHE-RT

Micro Profile Millwork, Task & Cove Fixture

Customer: _____ Date: _____ Type: _____

Project: _____

Wattage	4W or 8W per linear ft.
Input Voltage	24VAC
Control	Forward/Reverse Phase Line Dimmer 0-10V, DALI, or DMX*
LED Spacing	5/8" on Center
Length	12"-72" in 6" increments.
Total Height	0.57"
Total Width	0.98"
Color Options	2400K, 2700K, 3000K, 3500K, 4000K, 5000K
Mounting	Fixed
Available Optics	120°
Rating	IP50, Interior Only
CRI	90+ CRI
Transformer Type	Magnetic Low Voltage
Finish	Black, White, Grey
Material	Anodized Aluminum
Custom	Contact Factory
Dimming	Patented CleanDim® Technology ensures even dimming from 0-100%.
Max Run	10 ft. (Class 2 Limited (8W))
Environmental	Operating temperature:-40°F-140°F Ambient(-40°C-60°C)** Storage temperature -40°F-140°F Ambient indoor fixtures operation limited to =<50% relative humidity

*Uses Boca SDS Module for 0-10V, Dali, or DMX Dimming.
**Military spec available under special request-lead times may be impacted.




PRODUCT SPECIFICATIONS:

PRODUCT	WATTAGE	COLOR OPTION	VOLTAGE	TRANSFORMER PRIMARY VOLTAGE	OPTIC	FINISH	MOUNTING	LENS
NICHE RT								
	4W 8W	2400K 2700K 3000K 3500K 4000K 5000K	24VAC	120V 277V (Fixture is 24VAC)	120°x120°	A Clear Anodized Aluminum	F Fixed	C Clear CLD Clear Light Diffused HD Heavy Diffused

DIMENSIONS:

Allow 1/4" for each end cap and 2" for power feed cable.

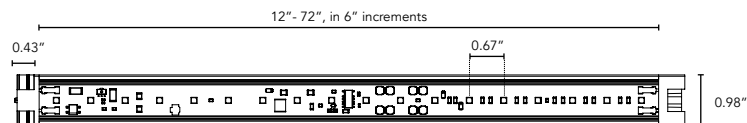


Plan View



Elevation View

MOUNTING INFORMATION:

For vertical installation and installations above 4' please contact the factory for specific mounting instructions.



Fixed