





1 PLAN VIEW

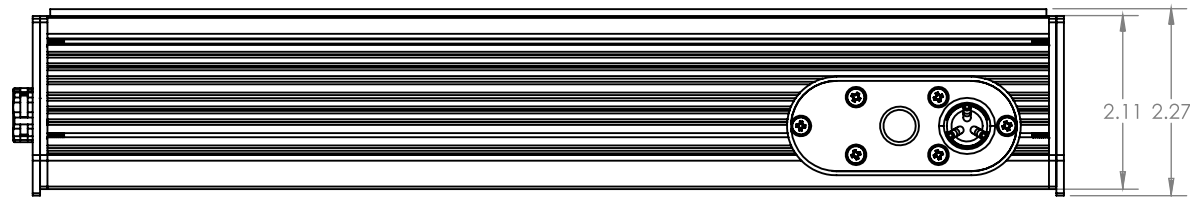

2 ELEVATION VIEW

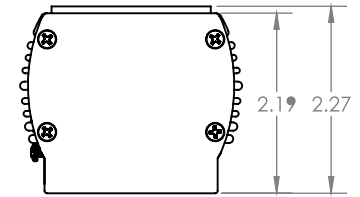

3 END CAP

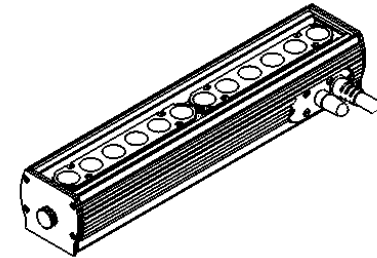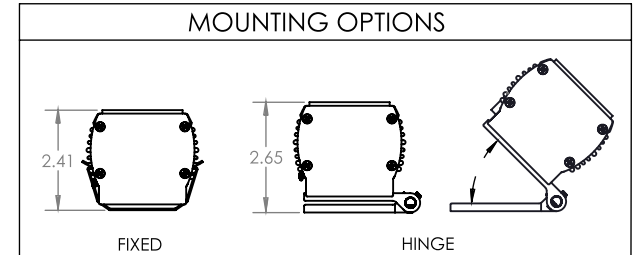

TECHNICAL DATA	
Parameter	Data
Power	18W
Input Voltage	120Vac or 277Vac
Input Current per Linear Ft	165mA@120Vac, 75mA@277Vac
Control	DMX512, Wireless DMX
Power Cable Length	6.5ft
LED Spacing	1" on center
Fixture Length	1ft, 2ft or 4ft
Fixture Width	2.7"
Total Height (not including clips)	2.17"
Mounting	Fixed, Swivel or Large Swivel
Available Optics	10°, 30°, 60°, 10°x 60°, 30°x 60°, 120°
Finish Options	Clear Anodized Aluminum
LED Color Options	RGB, Triple Diode RGB, White Mixing
Color Rendering Index	95 CRI (WM)
Ratings	Dry, IP65, IP68
Total Linear ft per 20A breaker	90ft@120Vac, 200@277Vac
Total Linear ft per 15A breaker	67ft@120Vac, 160ft@277Vac
Total Linear ft per Power Feed Transformer	24ft@120Vac, 50ft@277Vac

<p>508 South Military Trail Deerfield Beach FL, 33442</p> <p>www.BocaFlasher.com (561) 989-5338</p>		PRODUCT NAME: <b>HPCCS</b>	
		FILE NAME: TECHNICAL SHEET	PART #:HPCCS
DRAWN BY: HYERI KANG		DATE: 03272020	
DESIGN BY: LUIS ROSADO			
APPROVED BY: M. PINDER			
THIS DOCUMENT IS CONFIDENTIAL AND PROTECTED BY COPYRIGHTS OF BOCA FLASHER INC.		SCALE:	SHEET: 2 OF 2
		REV: A	