


1 PLAN VIEW





2 ELEVATION VIEW

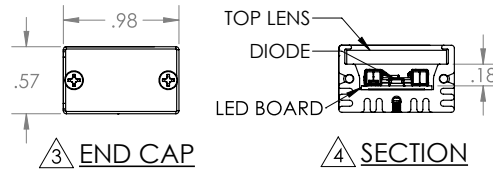


3 END CAP

4 SECTION

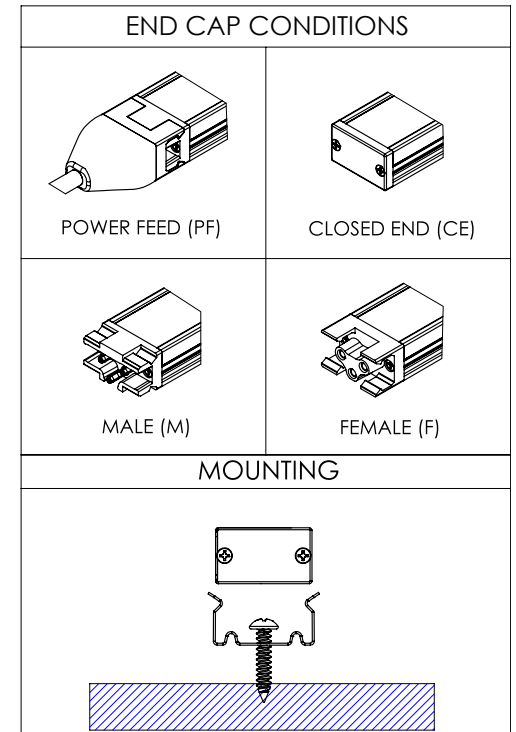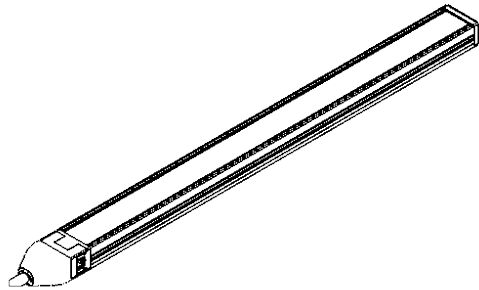

TECHNICAL DATA	
Parameter	Data
Power	4 Or 8 watts per linear ft.
Input Voltage	90-120V
Input Current per Linear Ft	45mA@4W, 70mA@8W
Control	Leading-edge/Trailing-edge line dimmer
Power Cable Length	UL Standard 10ft
LED Spacing	5/8" on center
Fixture Length	12"-72", in 4" increment
Fixture Width	0.99"
Total Height (not including clips)	0.56"
Mounting	Fixed Clip
Available Optics	120°
Finish Options	Clear Anodized Aluminum
LED Color Options	24K, 27K, 30K, 35K, 40K, 50K
Color Rendering Index	90+ CRI
Ratings	Dry
Total Linear ft per 20A breaker	330ft@4W or 210ft@8W
Total Linear ft per 15A breaker	247ft@4W or 157@8W
Total Linear ft per Power Feed	84ft@4W or 54ft@8W
Transformer	N/A

 LIGHTING CONTROLS LED Lighting Systems, Technologies, & Manufacturing		PRODUCT NAME: NICHE-HV	
508 South Military Trail Deerfield Beach FL, 33442		www.BocaFlasher.com (561) 989-5338	
THIS DOCUMENT IS CONFIDENTIAL AND PROTECTED BY COPYRIGHTS OF BOCA FLASHER INC.		FILE NAME: TECHNICAL SHEET	PART #: NICHE-HV
		DRAWN BY: HYERI KANG	DATE: 03272020
		DESIGN BY: LUIS ROSADO	
		APPROVED BY: M. PINDER	
SCALE:	SHEET: 1 OF 1	REV: B	